



MOTOPOMPE INCENDIE
EUROMAST FIRE PUMPS

EN

FIRE **PUMPS**





Leader in the manufacturing and distribution of **FIRE FIGHTING PUMPS**

HIGH PRESSURE AND LOW PRESSURE

- **PORTABLE FIRE PUMPS**
- **PUMPS FOR FOREST FIRE**
- **TEST PUMPS**
- **FIXED MOTOR PUMP GROUPS FIRE PROTECTION**
- **TOWABLE PUMPS**
- **FLEXIBLE AND RIGID TANKS**
- **FIRE HOSES**
- **FIRE NOZZLES**
- **MONITORS**

TEAM UP TO BE SAFER

The emergency sector is a constant challenge. We interpret it literally by questioning ourselves every day in thinking of machines that guarantee a higher level of safety and performance.

That is why our multifunctional motor pumps and electric pumps, lighting towers and generators are used by civil defense and firefighters around the world for their efficiency, durability and reliability. A wide range of highly customizable products is the guarantee of your safety.



INNOVATIVE PRODUCTS

- research and development
- designs, models



ADAPTED TO YOUR NEEDS

- highly personalized solutions and tailor-made products



**PROMPT AND SECURE
PAYMENT**



**FREE QUOTE
WITHIN 24 HOURS**



**INTERNATIONAL
DELIVERY**



**AVAILABLE PRODUCTS
QUICKLY**



Summary



01

MOTOR FIRE PUMPS

Page 4



05

FLOOD TRAILERS

Page 24



02

MOTOR FLOATING PUMPS

Page 10



06

FIRE NOZZLES

Page 30



03

EXHAUST MOTOR PUMPS

Page 14



07

FIRE HOSES


Page 34



04

MOTOR PUMPS FOR TESTING DRY COLUMNS

Page 20



08

KEYS, TAPS ACCESSORIES

Page 38

001

MOTOR FIRE PUMPS

Discover our range of portable fire pumps with petrol or diesel engines. Lightweight, powerful, efficient, durable, these are just some of the qualifiers describing our range of high pressure pumps.

All motor pumps can be sold ready to install, in kit form or on a trailer.





DIESEL FIRE PUMP ELECTRIC START

EFP-400/14-D-E



ENGINE	
ENGINE REFERENCE	195FE
FUEL	Diesel
STARTER	Electric + manual emergency
FUEL TANK	5.5 L
POWER	15 hp / 11 Kw
PUMP	
MAX FLOW RATE	400 l/min
PERFORMANCES	200 l/min at 10 bar 315 l/min at 6 bar
DIAM SUCTION	2" female
DIAM DISCHARGE	2" female
PUMP BODY AND TURBINE	Font
PRIMING	Charging (by gravity) Electric priming optional
DIMENSIONS	64 X 54 X 62,5 cm
WEIGHT	110 KG



PRESSURE
Up to 14 bar



PUMP FLOW RATE
Up to 400 l/min



WATER COMPATIBILITY
Clear waters

DIESEL FIRE PUMP ELECTRIC START

EFP-550-8-D-E



ENGINE	
ENGINE REFERENCE	186FA
FUEL	Diesel
STARTER	Electric + manual emergency
FUEL TANK	5.5 L
POWER	13 hp / 7.5 Kw
PUMP	
MAX FLOW RATE	584 l/min
PERFORMANCES	250 l/min at 6 bar 410 l/min at 3 bar
DIAM SUCTION	2" female
DIAM DISCHARGE	2" female
PUMP BODY AND TURBINE	Aluminum
PRIMING	Charging (by gravity) Electric opriming ptional
DIMENSIONS	64 X 50 X 52,5 cm
WEIGHT	89 KG



PRESSURE
Up to 8.5 bar



PUMP FLOW RATE
Up to 584 l/min



WATER COMPATIBILITY
Clear water

GASOLINE FIRE PUMP


EFP-900-6P



ENGINE	
ENGINE REFERENCE	Briggs & Stratton - 2 cylinder 4 stroke
FUEL	Gasoline
STARTER	Electric 12V + emergency manual
TANK	8 L
POWER	23 hp /17 Kw
PUMP	
MAX FLOW RATE	2000 l/min
PERFORMANCES	864 l/min at 6 bar 1072 l/min at 5 bar
DIAM SUCTION	4" male
DIAM DISCHARGE	2"1/2 male
PUMP BODY AND TURBINE	Aluminum
PRIMING	Exhaust gas
DIMENSIONS	75 X 56 X 70 cm
WEIGHT	76.2 KG

 **PRESSURE**
Up to 10 bar

 **PUMP FLOW RATE**
Up to 2000 l/min

 **WATER COMPATIBILITY**
Clear waters

FIRE PUMP FOR SEAWATER

EFP-900-6BS-M



ENGINE	
ENGINE REFERENCE	Briggs & Stratton - 2 cylinder 4 stroke
FUEL	Gasoline
STARTER	Electric 12 V + emergency manual
FUEL TANK	8 L
POWER	23 hp / 17 Kw
PUMP	
MAX FLOW RATE	2000 l/min
PERFORMANCES	864 l/min at 6 bar 1072 l/min at 5 bar
DIAM SUCTION	4" male
DIAM DISCHARGE	2" 1/2" male
PUMP BODY AND TURBINE	Aluminum alloy in marine grade
PRIMING	Exhaust gas
DIMENSIONS	75 X 56 X 70 cm
WEIGHT	79.2 KG

 **PRESSURE**
Up to 10 bar

 **PUMP FLOW RATE**
Up to 2000 l/min

 **WATER COMPATIBILITY**
Seawater



COMPACT PORTABLE FIRE PUMP

EFP-1400-200



FEATURES

ENGINE

ENGINE REFERENCE	Kholer KD 425
FUEL	2 cylinder Diesel
STARTER	Electric 12 V + emergency manual
TANK	4 L
POWER	19 hp / 14 Kw

PUMP

MAX FLOW RATE	1400 l/min
PERFORMANCES	1100 l/min at 4 bar 450 l/min at 8 bar
DIAM SUCTION	4" BSRT or 3"1/2 BSP Female
DIAM DISCHARGE	2 x 2"1/2 male
PUMP BODY AND TURBINE	Aluminum alloy in marine grade
PRIMING	Exhaust gas
DIMENSIONS	80 X 53 X 58 cm
WEIGHT	114 KG



PRESSURE
Up to 8 bar



PUMP FLOW RATE
Up to 1400 l/min



WATER COMPATIBILITY
Seawater

MOBILE FIRE PUMP

EFP-2500-300



FEATURES

ENGINE

ENGINE REFERENCE	OHV 4J1B1 2-cylinder 4-stroke
FUEL	Diesel
STARTER	Electric
FUEL TANK	16 L
POWER	76 hp / 57 Kw

PUMP

MAX FLOW RATE	2500 l/min
PERFORMANCES	1500 l/min at 8 bar 2000 l/min at 7 bar
DIAM SUCTION	2 x 2"1/2 Female
DIAM DISCHARGE	2"1/2 male
PUMP BODY	Aluminum alloy in marine grade
PRIMING	Exhaust gas
DIMENSIONS	102 X 60,5 X 76 cm
WEIGHT	321 KG



PRESSURE
Up to 10 bar



PUMP FLOW RATE
Up to 2500 l/min



WATER COMPATIBILITY
Seawater

FIRE PUMP HOME DEFENDER TROLLEY KIT

KIT-HOME DEFENDER



ENGINE	
ENGINE REFERENCE	Loncin
FUEL	Petrol - 4 stroke
STARTER	Manual
FUEL TANK	6.5 L
POWER	14 hp / 10 Kw
PUMP	
MAX FLOW RATE	500 l/min
PERFORMANCES	350 l/min at 6 bar 420 l/min at 4 bar
DIAM SUCTION	2" male
DIAM DISCHARGE	2" male
PUMP BODY	Font
PRIMING	Self-priming (filling pump body)
DIMENSIONS	65 X 53 X 59 cm
WEIGHT	62 KG
KIT PROVIDED	<ul style="list-style-type: none"> • 3 positions launcher (closed, straight and mist jet), • Discharge pipe (40m), • Suction pipe (6m), • 1 strainer

PRESSURE
Up to 10 bar

PUMP FLOW RATE
Up to 500 l/min

WATER COMPATIBILITY
Clear waters

FIRE PUMP AUTONOMOUS KIT HOME DEFENDER

KIT-HOME-DEFENDER-N



Specially from signed to protect your home in the event of a forest fire.

ENGINE	
ENGINE REFERENCE	EUROMAST 170F
FUEL	Gasoline
STARTER	Manual
FUEL TANK	3.6 L
POWER	7 Hp
PUMP	
MAX FLOW RATE	30 m3/h
MAX PRESSURE	6,5 bar
DIAM SUCTION	2" (DN50)
DIAM DISCHARGE	2" (DN50)
HAUTEUR D'ASPIRATION MAX	7 m
PRIMING	Self-priming (filling pump body)
DIMENSIONS	64 X 54 X 90 cm
WEIGHT	49 KG
KIT FOURNI	<ul style="list-style-type: none"> • 2 positions launcher (traight jet or diffused jet), • Discharge pipe (2x20m), • Suction pipe (7m), • 1 strainer

PRESSURE
Up to 6,5 bar

PUMP FLOW RATE
Up to 30 m3/h

WATER COMPATIBILITY
Clear waters



PORTABLE HIGH PRESSURE FIRE PUMP

EFP-1500-10



FEATURES

ENGINE	EFP-1500-10	EFP-1000-10
ENGINE REFERENCE	FPT 1368	FPT 1368
FUEL	Gasoline	Gasoline
STARTER	Electric + manual	Electric 12 V + emergency manual
FUEL TANK	18 L	15 L
POWER	77 cv / 57 Kw	77 cv / 57 Kw
PUMP		
MAX FLOW RATE	2000 l/min	2400 l/min
PERFORMANCES	1500 l/min at 10 bar 1800 l/min at 8 bar	1040 l/min at 10 bar 1730 l/min at 8 bar
DIAM SUCTION	4" 1/2 male	4" 1/2 male
DIAM DISCHARGE	2 X 2" 1/2 male	2 X 2" 1/2 male
PUMP BODY AND TURBINE	Marine grade aluminum alloy	Marine grade aluminum alloy
PRIMING	Automatic dry	Automatic
DIMENSIONS	110,9 X 74 X 84 cm	109,2 X 74,9 X 84,2 cm
WEIGHT	195 KG	192,5 KG



PRESSURE
Up to 16 bar



PUMP FLOW RATE
Up to 2000 l/min



WATER COMPATIBILITY
Seawater

PORTABLE BACKPACK PUMP FOR FOREST FIRES

EFP-FF-288/21

The lightest motor pump on the market. Specially designed for use in forest fires.
Lightweight and easily transportable with a backpack provided.
A backpack for accessories is also available.



FEATURES

ENGINE	
ENGINE	2 Times
FUEL	Mix 2 cycles
STARTER	Manual and electric by power bank
FUEL TANK	Separated 12 or 24L
POWER	10 Hp
POMPE	
MAX FLOW RATE	288 l/min
MAX PRESSURE	22 bar
PUMP TYPE	Turbine pump
PUMP BODY AND TURBINE	Hard alu
DIMENSIONS	39 X 29 X 17 cm
WEIGHT	12 Kg



PRESSURE
Up to 22 bar



PUMP FLOW RATE
up to 288 l/min



02

FLOATING MOTOR PUMPS

Our floating pumps are intended for pumping water from flooded areas, streams, ponds and available water sources.

AQUAFLOAT floating pump range.

With 2 or 4 stroke engines, EUROMAST gives you a complete choice of floating motor pumps for exhaustion or fire.





FLOATING MOTOR PUMP 1250 L/MIN ELECTRIC START

EFP-1250-FL-De



FEATURES	ENGINE	
	ENGINE REFERENCE	Briggs & Stratton (série 950)
	FUEL	Gasoline
	STARTER	Electric (power bank) and manual as backup
	FUEL TANK	3.8 L
	POWER	4.1 kW / 5.1 Kw
	PUMP	
	MAX FLOW RATE	1258 l/min
	PERFORMANCES	372 l/min at 3 bar 641 l/min at 2 bar
	DIAM DISCHARGE	2"1/2 male
PUMP BODY AND TURBINE	Aluminum	
FLOTTEUR	Durable polyethylene	
DIMENSIONS	71 X 61 X 38 cm	
WEIGHT	26.5 KG	



PRESSURE
Up to 4.4 bar



PUMP FLOW RATE
Up to 1258 l/min

FLOATING MOTOR PUMP 1309 L/MIN

EFP-1300-32-FL



FEATURES	ENGINE	
	ENGINE REFERENCE	Briggs & stratton (850 series)
	FUEL	Gasoline
	STARTER	Manual
	FUEL TANK	3.8 L
	POWER	5.5 hp / 4.1 Kw
	PUMP	
	MAX FLOW RATE	1309 l/min
	PERFORMANCES	70 l/min at 3 bar 407 l/min at 2 bar
	DIAM DISCHARGE	2"1/2 male
PUMP BODY AND TURBINE	Aluminum	
FLOTTEUR	Polyethylene	
DIMENSIONS	71 X 61 X 40 cm	
WEIGHT	24.4 KG	



PRESSURE
Up to 3 bar



PUMP FLOW RATE
Up to 1309 l/min

FLOATING MOTOR PUMP 480 L/MIN

EFE-FF-CIT-ST



FEATURES

ENGINE

ENGINE REFERENCE	2 times
FUEL	Gasoline
STARTER	Manual + Electric (optional)
FUEL TANK	5 L
POWER	8 hp / 6.1 Kw

PUMP

MAX FLOW RATE	480 l/min
PERFORMANCES	327 l/min at 4 bar
	151 l/min at 7 bar
	21 l/min at 9.5 bar
DIAM DISCHARGE	2" male
PUMP BODY AND TURBINE	Aluminum
FLOAT	Polyethylene
DIMENSIONS	83 X 51.5 X 42.5 cm
WEIGHT	21.2 KG



PRESSURE
Up to 9.5 bar



PUMP FLOW RATE
Up to 480 l/min

FLOATING MOTOR PUMP 1540 L/MIN

EFP-1500-2H-FL



FEATURES

EFP-1500-FL

ENGINE REFERENCE	Honda GXV 390
FUEL	Gasoline
STARTER	Manual
FUEL TANK	2.1 L
POWER	10 hp / 7.6 Kw

PUMP

MAX FLOW RATE	1540 l/min
PERFORMANCES	315 l/min at 4.5 bar
	610 l/min at 3 bar
	870 l/min at 2 bar
DIAM DISCHARGE	2"1/2 male
PUMP BODY AND TURBINE	Aluminum
FLOAT	Polyethylene
DIMENSIONS	103 X 73 X 50 cm
WEIGHT	53 KG



PRESSURE
Up to 5.5 bar



PUMP FLOW RATE
Up to 1540 l/min



FLOATING MOTOR PUMP 2512 L/MIN

EFP-2400-FL



FEATURES

ENGINE	
ENGINE REFERENCE	Honda GXV 390
FUEL	Gasoline
STARTER	Manual
FUEL TANK	2.1 L
POWER	10 hp / 7.6 kw
PUMP	
MAX FLOW RATE	2512 l/min
PERFORMANCES	1872 l/min at 1 bar
	932 l/min at 2 bar
	30 l/min at 2.4 bar
DIAM DISCHARGE	4" male
PUMP BODY AND TURBINE	Aluminum
FLOAT	Polyethylene
DIMENSIONS	98 X 71 X 50 cm
WEIGHT	56 KG



PRESSURE
Up to 2.4 bar



PUMP FLOW RATE
Up to 2512 l/min

PORTABLE TANK 2000 L

EFP-CITERNE-2000

Portable water storage tank with stents

Good wear resistance, high tear resistance, high strength and long service life.



FEATURES


MATTER	PVC coated fabric 980g/m2
MATERIAL THICKNESS	0,8 mm
DESIGN	Open top
KIND	Self-supporting
ASSEMBLY TIME	< 5 minutes
RESISTANCE TO BREAKAGE	> 2500 N/cm
APPLICABLE TEMPERATURE	20 °c to 70 °c



03

MOTORPUMPS

Construction site drainage pumps can be either submersible or surface-mounted. They efficiently circulate both clear and muddy water. Sump pumps are commonly used for draining water from construction sites and excavations. They are also well-suited for civil or industrial applications, such as surface drying.

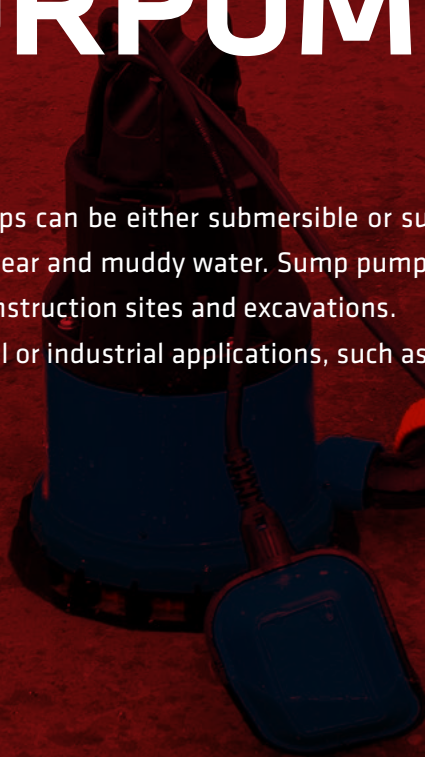



SUBMERSIBLE ELECTRIC PUMP

EFP-250-E-VC



FEATURES	
ENGINE	
TENSION	230V
FREQUENCY	50 Hz
POWER ABSORBED	650 W
ELECTRICAL CORD	10 m with male plug
PUMP	
MAX FLOW RATE	15 m ³ /h
MAX PRESSURE	11 m
DIAM OUTPUT	2"
SOLID PASSAGE	25 mm
TYPES OF WATER	Loaded waters
DIMENSIONS	27 X 21 X 48 cm
WEIGHT	10 KG



MAX FLOW RATE

Up to 15 m³/h



TYPES OF WATER

Loaded waters

SUBMERSIBLE DRAINAGE PUMP

EFE-370TSM



The pumps in the EFE-370TS(M) series are single-phase submersible pumps, compact, high-performance, and durable, designed for handling abrasive liquids on challenging construction sites, including mines, industries, public services, and construction projects.

The pump body and parts in contact with water are made of cast iron. Depending on the size, the pumps are equipped with a semi-open impeller made from high-strength stainless steel or ductile iron alloy.

Efficient cooling of the motor is achieved via a discharge channel integrated into the motor housing. Discharge outlets range from 50 mm to 80 mm. Motor power ranges from 0.25 kW to 1.5 kW. The hermetically sealed motors are equipped with an integrated thermal protection system.

Technical Specifications:

- Maximum Capacity: 42 m³/h
- Power: 0.25 kW to 1.5 kW
- Power Supply: Single-phase 230V ± 10%, 50 Hz
- Insulation Class: F
- Protection Rating: IP68
- Cable Length: 10 m
- Water Temperature: Up to 40°C
- Maximum Water Depth: 25 m



Download our complete **electro-pumps catalog**

DIESEL EXHAUST PUMP

EFP-W30D



ENGINE	
ENGINE REFERENCE	178 F
FUEL	Diesel
STARTER	Manual + Electric (optional)
FUEL TANK	14 L
POWER	7 hp / 9.5 Kw
AUTONOMY	2 hours approximately
PUMP	
MAX FLOW RATE	50 m3/h
MAX PRESSURE	26 m
DIAM SUCTION	3" male
DIAM DISCHARGE	3" male
SOLID PASSAGE	35 mm
TYPES OF WATER	Loaded waters
DIMENSIONS	57 X 47 X 67,5 cm
WEIGHT	62 KG



MAX FLOW RATE
Up to 50 m3/h



TYPES OF WATER
Loaded waters

HOME PROTECTION EXHAUST MOTOR PUMP

EFP-W20D



ENGINE	
ENGINE REFERENCE	4 Time
FUEL	Gasoline
STARTER	Manual
FUEL TANK	3.6 L
POWER	4.8 hp / 6.5 Kw
PUMP	
MAX FLOW RATE	30m3/h
MAX PRESSURE	30 m
DIAM SUCTION	2" male
DIAM DISCHARGE	2" male
PUMP BODY AND TURBINE	Alu
SOLID PASSAGE	10 mm
TYPES OF WATER	Used
DIMENSIONS	50 X 38.5 X 41 cm
WEIGHT	23 KG



MAX FLOW RATE
Up to 30 m3/h



TYPES OF WATER
Waste water



GASOLINE EXHAUST MOTOR PUMP

EFP-120-3



ENGINE	
ENGINE REFERENCE	Honda GX390
FUEL	Gasoline
STARTER	Manual
FUEL TANK	6.1 L
POWER	10.8 hp / 8.7 Kw
AUTONOMY	2 Hours
PUMP	
MAX FLOW RATE	123 m3/h
MAX PRESSURE	30 bar-30 m
DIAM SUCTION	4" male
DIAM DISCHARGE	4" male
PUMP BODY AND TURBINE	Alu
SOLID PASSAGE	27 mm
TYPES OF WATER	Loaded waters
DIMENSIONS	78,5 X 56,5 X 63 cm
WEIGHT	85 KG

FEATURES



MAX FLOW RATE

Up to 123 m3/h



TYPES OF WATER

Eaux chargées

CHEMICAL RESISTANT EXHAUST MOTOR PUMP

EFP-30-5-AGRI



ENGINE	
ENGINE REFERENCE	Honda GX120 4 stroke
FUEL	Gasoline
STARTER	Manual
FUEL TANK	6.5 L
POWER	2.6 KW / 3600 rpm
AUTONOMY	4 Hours
PUMP	
MAX FLOW RATE	33.5 m3/h
MAX PRESSURE	26 m
DIAM SUCTION	2" Female
DIAM	2" Female
PUMP BODY AND TURBINE	PVC
SOLID PASSAGE	10 mm
TYPES OF WATER	Wastewater and Seawater, chemical
DIMENSIONS	51 X 41,8 X 43,3 cm
WEIGHT	22 KG

FEATURES



MAX FLOW RATE

Up to 33.5 m3/h




TYPES OF WATER

Wastewater and seawater, chemical

MOTOR PUMP FOR EXHAUSTING VERY CHARGED WATER

EFP-900-2-D

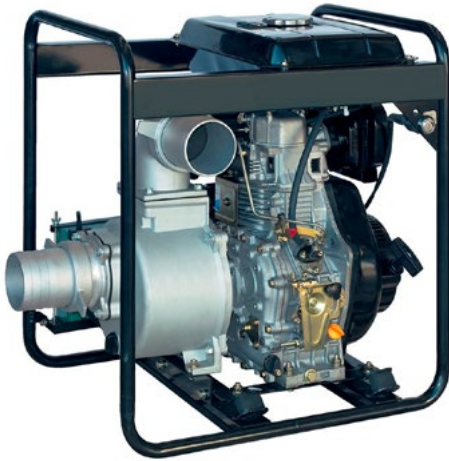

FEATURES	ENGINE	
	ENGINE REFERENCE	198 F
	FUEL	Diesel
	STARTER	Electric + Manual
	FUEL TANK	12.5 L
	POWER	9.6 hp / 6.7 Kw
	AUTONOMY	4 Hours
	PUMP	
	MAX FLOW RATE	96 m3/h
	MAX PRESSURE	31 m
DIAM SUCTION	4" male	
DIAM DISCHARGE	4" male	
PUMP BODY AND TURBINE	Alu	
SOLIDE PASSAGE	10 mm	
TYPES OF WATER	Waste water	
DIMENSIONS	67 X 50,5 X 74 cm	
WEIGHT	87 KG	

 **MAX FLOW RATE**
Up to 96 m3/h

 **TYPES OF WATER**
Waste water

MOTOR PUMP FOR EXHAUSTING VERY CHARGED WATER

EFP-51-3-EL / EFP-51-3-H / EFP-51-3-D



FEATURES	ENGINE	ELECTRIC	GASOLINE	DIESEL	
	ENGINE REFERENCE	230/400V three-phase	Honda GX160QX	Kholer KD15350 Yanmar L48	
	STARTER	Electric + manual or manual (except Electric)			
	TUBULAR CHASSIS	Handles with wheels optionon			
	FUEL TANK	Depending on engine			
	POWER	2.7 hp / 2.2 Kw			
	AUTONOMY	2 Hours			
	PUMP				
	MAX FLOW RATE	51 m3/h			
	MAX PRESSURE	30 m			
DIAM SUCTION	2" male				
DIAM DISCHARGE	2" male				
PUMP BODY	and Turbine : Cast iron				
PASSAGE DE SOLIDE	28 mm				
TYPES OF WATER	Dirty water + Seawater (optional)				
DIMENSIONS	77,5 X 44 X 59 cm				
WEIGHT	30 KG				

 **MAX FLOW RATE**
Up to 51 m3/h

 **TYPES OF WATER**
Dirty water and seawater (optional)



MOTOR PUMP FOR EXHAUSTING VERY CHARGED WATER

EFP-100-2.8-EL / EFP-100-2.8-H / EFP-100-2.8-D



FEATURES	ENGINE	ELECTRIC	GASOLINE	DIESEL
	ENGINE REFERENCE	230/400V three-phase	Honda - Robin Briggs - Lombardini	Hatz Lombardini
	STARTER	Electric + manual or manual (except Electric)		
	CHASSIS TUBULAIRE	Handles with wheels optionon		
	FUEL TANK	Depending on engine		
	POWER	10.8 hp / 8.7 Kw		
	AUTONOMY	2 Hours		
	PUMP			
	MAX FLOW RATE	100 m3/h ; Electric motor : 1800t		
	MAX PRESSURE	28 m		
DIAM SUCTION	3" male			
DIAM DISCHARGE	3" male			
PUMP BODY AND TURBINE	Font			
SOLID PASSAGE	38 mm			
TYPES OF WATER	Dirty water + Seawater optional			
DIMENSIONS	86 X 58 X 63 cm			
WEIGHT	52 KG			



MAX FLOW RATE

Up to 100 m3/h



TYPES OF WATER

Dirty water and seawater (optional)

MOTOR PUMP FOR EXHAUSTING VERY CHARGED WATER

EFP-144-3-EL / EFP 143-3 / EFP-144-3-D



FEATURES	ENGINE	ELECTRIC	GASOLINE	DIESEL
	ENGINE REFERENCE	230/400V three-phase	Honda - Robin Briggs - Lombardini	Hatz Lombardini
	STARTER	Electric + manual or manual (except Electric)		
	CHASSIS TUBULAIRE	Handles with wheels option		
	FUEL TANK	Frompending on engine		
	POWER	10.8 hp / 8.7 Kw		
	AUTONOMY	2 Hours		
	PUMP			
	MAX FLOW RATE	144m3/h		
	MAX PRESSURE	32 m		
DIAM SUCTION	FM 4" male			
DIAM DISCHARGE	FM 4" male			
PUMP BODY AND TURBINE	Font			
SOLID PASSAGE	40 mm			
TYPES OF WATER	Dirty water + Seawater (optional)			
DIMENSIONS	86 X 58 X 63 cm			
WEIGHT	70 KG			



MAX FLOW RATE

Up to 144 m3/h



TYPES OF WATER

Dirty water and seawater (optional)

04

COLONNE
SECHE

Parking

Théâtre

MOTOR PUMPS TO TEST DRY COLUMN

Test pump for checking dry columns under static pressure.

Test your dry columns easily with our test pumps. When a fire occurs, it is imperative that the water columns are functional and comply with standard NF S 61-759 «Installation and maintenance of dry and loaded columns» in order to detect a possible leak or failure on a component part, and for this it is mandatory to carry out hydrostatic tests (Pressurization at 16/25B).





THERMAL TEST PUMP FOR DRY GASOLINE COLUMNS

EFP-25-0.8B - STATIC TEST



FEATURES

ENGINE

ENGINE REFERENCE	Honda GP160 -4Hp
FUEL	Gasoline
STARTER	Manual
FUEL TANK	31 L
POWER	4 hp / 3 Kw

PUMP

MAX FLOW RATE	25 l/min
MAX PRESSURE	25 bar
PUMP TYPE	Diaphragm pump
PUMP BODY AND TURBINE	Aluminum
DIMENSIONS	67 X 45 X 46 cm
WEIGHT	36 Kg



PRESSURE
Up to 25 bar



PUMP FLOW RATE
Constant 25 l/min

ELECTRIC TEST PUMP FOR DRY COLUMNS

EFP-25-0.8-B-E - STATIC TEST



FEATURES

ENGINE

STARTER	Electric
POWER	Single phase 240 V/Hz

PUMP

MAX FLOW RATE	25 l/min
MAX PRESSURE	25 bar
PUMP TYPE	Diaphragm pump
PUMP BODY AND TURBINE	Aluminum
DIMENSIONS	67 X 45 X 46 cm
WEIGHT	33 Kg



PRESSURE
Up to 25 bar



PUMP FLOW RATE
Constant 25 l/min

TEST PUMP KIT FOR STATIC DRY COLUMNS WITH TANK FOR PICK-UP OR TRAILER

EFP-KIT-PUMP



FEATURES

ENGINE	ELECTRIC	GASOLINE
ENGINE REFERENCE	EFP-25-0.8-BE	EFP-25-0.8-B-
STARTER	Manual	
POWER	4 hp / 3 Kw	Single phase 240 V/Hz
PUMP		
MAX FLOW RATE	25 l/min	
MAX PRESSURE	25 bar	
PUMP TYPE	Diaphragm pump	
PUMP BODY AND TURBINE	Aluminum	
DIMENSIONS	147 X 100 X 67,9 cm	
WEIGHT	200 KG	





PRESSURE
Up to 25 bar



PUMP FLOW RATE
Constant 25 l/min



SHAPED TANKS
Cube (2500 l max), T or L shape (600 l max)

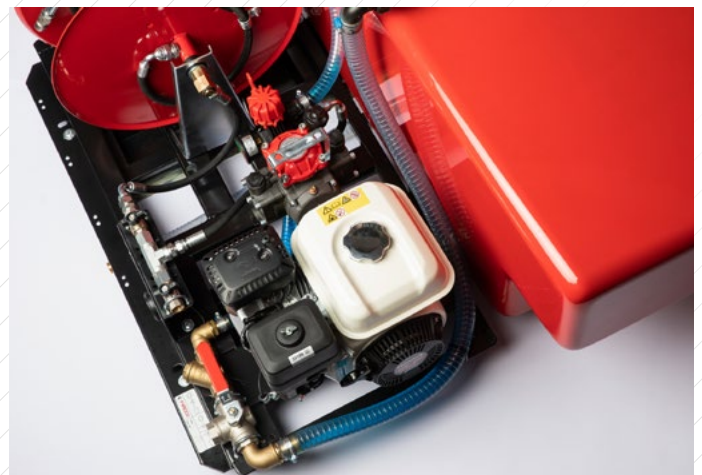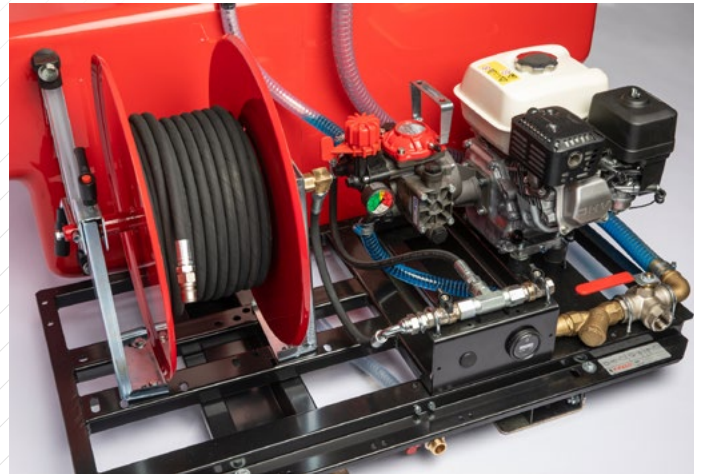



DYNAMIC TEST THERMAL PUMP KIT FOR DRY COLUMNS

EFP-1500-10 - DYNAMIC TEST



FEATURES	ENGINE	
	ENGINE REFERENCE	FPT 1368
	FUEL	Gasoline
	STARTER	Electric + Manual
	FUEL TANK	18 L
	POWER	77 hp / 57 Kw
	PUMP	
	MAX FLOW RATE	2400 l/min
	PERFORMANCES	1500 l/min at 10 bar 800 l/min at 8 bar
	DIAM SUCTION	4" 1/2 male
	DIAM DISCHARGE	2 X 2" 1/2 male
	PUMP BODY AND TURBINE	Aluminum alloy in marine grade
	PRIMING	Automatic
	DIMENSIONS	110,9 X 74 X 84 cm
WEIGHT	195 Kg	



PRESSURE
Up to 16 bar



PUMP FLOW RATE
Up to 2400 l/min



SHAPED TANKS
Cube (2500 l max), T or L shape (600 l max)



OTB



FLOOD TRAILERS

The patented multifunctional pumping unit can be used simultaneously as **generator**, **lighting mast** and pump with the possibility of doing **vary flow rates** and pressures thanks to an inverter. It guarantees water evacuation with flow rates of **100 to 500 m³/h**.

The **generator set**, supplied as standard in SUPER SILENT version, is available with a power supply from 10 to 200 kVA.

It is completed by a **LED lighting telescopic mast**.

Highly customizable equipment that improves end-user interventions.





FIREFIGHTER INTERVENTION TRAILER PERFORMANCE AND RELIABILITY AT A NEW LEVEL



PUMPING SYSTEM
Efficient and reliable
Self-priming with
high solids passage

CONTROL PANEL
Simple

ACCESSORIES INCLUDED
4 x 2m suction hoses 25m
discharge hose Suction
strainer
Spare wheel

CONFIGURATION
Soundproof or not

ROAD TRAILER
For rapid intervention



TECHNICAL SPECIFICATIONS

 **HMT**
From 18 to 48m

 **RATES**
From 150 at 900 m³/h

 **SOLID PASSAGE**
From 50 to 76 mm

 **SUCTION DEPTH**
Up to 8 meters




MIXED INTERVENTION TRAILER. THE MULTIFUNCTIONAL RESPONSE TO THE MOST DEMANDING SITUATIONS.





MULTIFUNCTIONAL FIREFIGHTER INTERVENTION TRAILER HIGHLY EFFECTIVE IN COMBATING CRITICAL PROBLEMS AND FLOOD EMERGENCY SITUATIONS.

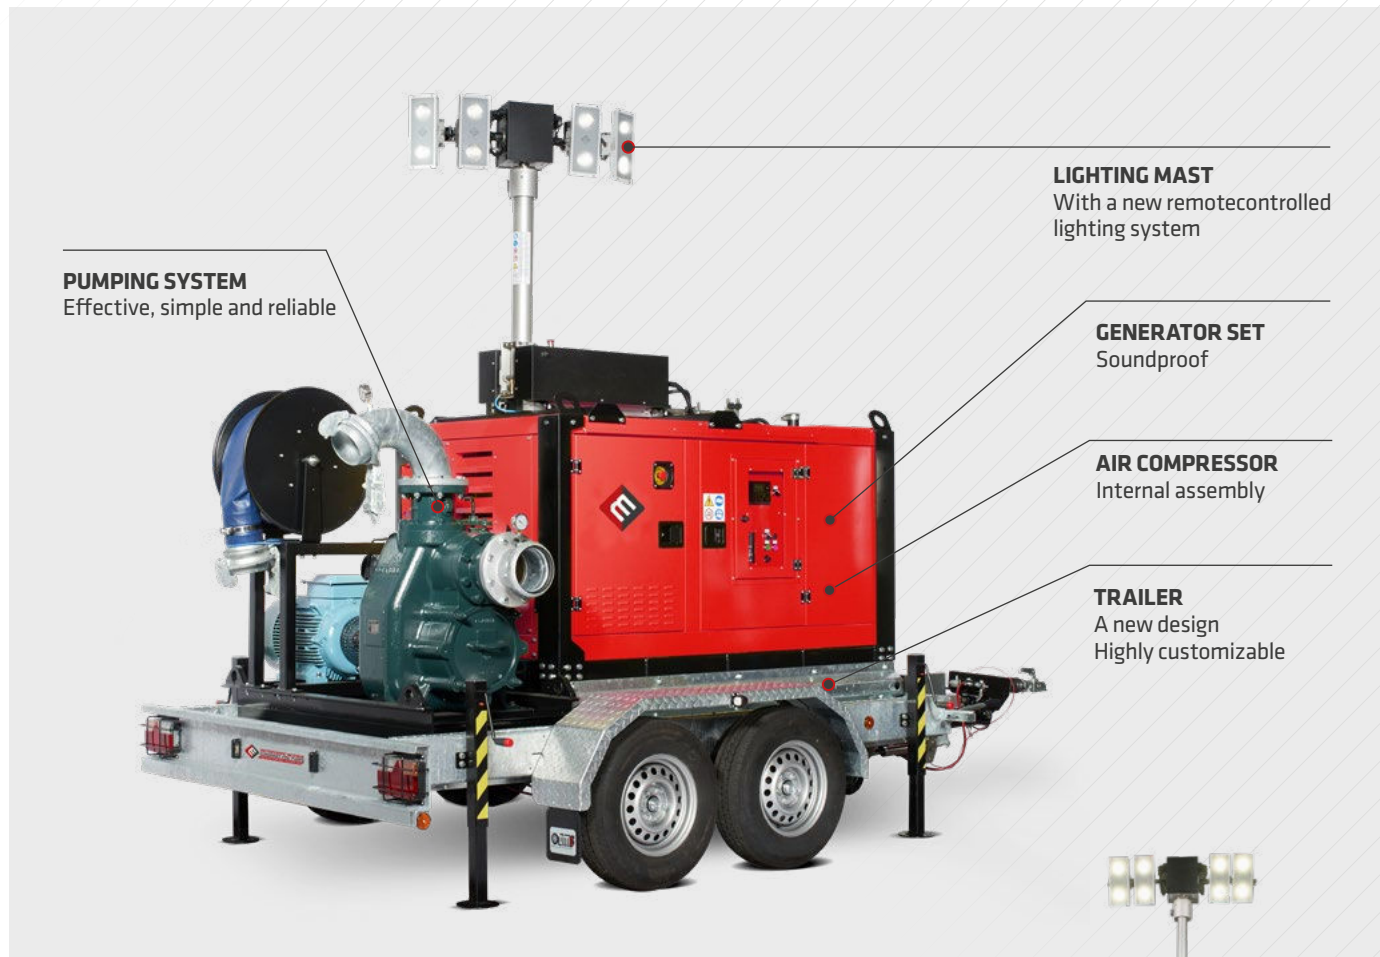

PUMPING SYSTEM
Effective, simple and reliable

LIGHTING MAST
With a new remotecontrolled lighting system

GENERATOR SET
Soundproof

AIR COMPRESSOR
Internal assembly

TRAILER
A new design
Highly customizable

TECHNICAL SPECIFICATIONS

 **PRESSURE**
From 2 at 16 bar

 **RATES**
From 100 to 500 m³/h

 **GENERATOR**
From 10 to 200 kVA

 **RESIDUAL POWER**
From 10 to 200 kVA

 **SUCTION DIAMETER**
From 100 mm (4")

 **SUCTION DEPTH**
Up to 8 meters



FLOOD EMERGENCY PUMPS. CUSTOMIZED SOLUTION FOR ANY TYPE OF NEED.

High-performance diesel engine pump units, adaptable to each type of need, with flow rates from 30 to 1450 m³/h with variable pressures. Each model can be specially designed and manufactured according to the specific requirements of the customer. Available in several ranges : FIXED, TOWABLE, SILENT...



TECHNICAL SPECIFICATIONS



PRESSURE
Up to 16 bar



PUMP FLOW RATE
Up to 1450 m³/h



MAX SOLIDS
3" (76 mm)



DISCHARGE FLANGE
DN80 at DN300 - 3" at 12"

APPLICATIONS

- ✓ Flood zone management
- ✓ Firefighting support Bypass
- ✓ Pumping
- ✓ Water transfer
- ✓ Control of the level of rivers, lakes, or bodies of water



CONFIGURATION TABLE

Configure your custom pump in just a few steps

ENERGY

- Diesel engine
 Gasoline engine
 Electric engine

PUMP OUTPUT PERFORMANCE



PUMP FLOW RATE

.....m³/h



PRESSURE

.....bar



WATER TYPE

- Clear water
 Charged water
 Salt water
 Others



CONTROL PANEL

- Simple
 From a distance

PRIMING SYSTEM



- Hand pump



- Primer tray



- Electric pump manual



- Electric Self Priming

VERSION	A	B	C	D	E
	FIXED	FORKLIFT	LIFTING HOOK	SLOW TRAILER	ROAD TRAILER
CONFIGURATION	1	2	3	4	5
	ALL OPEN	PROTECTIVE ROOF	SIDE PROTECTIONS	SILENT	SUPER SILENT

OSG

HAND FIRE NOZZLES

EUROJET fire nozzles are available in two ranges: selection flow (manually adjustable flow) or automatic flow (automatic adjustment flow to maintain constant pressure and distance jet). EUROFOAM foam adapters can be added to our nozzles to enable the use of emulsifier.

Euromast always puts the needs of its customers first by improving existing products to meet the most demanding situations.





Main features

- Manual flow adjustment with 4 to 5 different positions. *Adjustable from straight*
- Jet to diffused jet, up to screen jet
- Ergonomic handle for a good grip
- Optional foam adapter




Manual
Adjustable flow rate



AUTOMATIC
Automatic adjustable flow rate


Nozzle adjustment

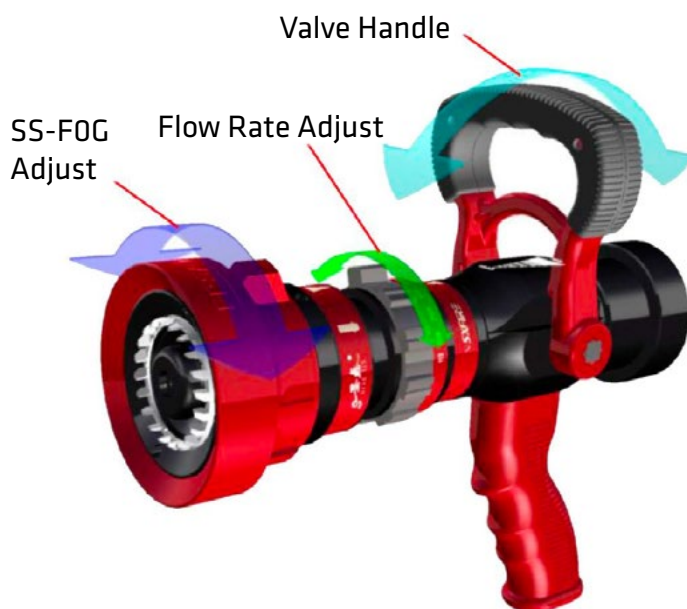

Straight Stream



Narrow Fog



Wide Fog



VARIABLE FLOW NOZZLE 150 L/MIN

EUROJET-150



VARIABLE FLOW NOZZLE 235 L/MIN

EUROJET-235



EFE-EUROJET-150		
FEATURES	VARIABLE FLOW	19-38-95-150 lpm/purge
	FLOW CONTROLE	Rotating ring
	MAXIMUM RANGE	25m at 6 bar
	MATERIALS	Hard anodized aluminum (body); molded nylon (handle); rubber (head bumper)
	VALVE	Ball valve
	VALVE MATERIALS	ABS, Aluminum
	MAX ANGLE OF DIFFUSED JET	From straight Jet to 110° jet
	DIMENSIONS	230 x 122 x 294mm
	WEIGHT	1.8 kg
	ACCESSORIES	Foam tube (optional)



**INLET
DIAMETER 1"**



**FLOW RATE
Up to 150 LPM**

EFE-EUROJET-235		
FEATURES	VARIABLE FLOW	60-130-235 lpm/purge
	FLOW CONTROLE	Rotating ring
	MAXIMUM RANGE	35m at 7 bar
	MATERIALS	Hard anodized aluminum (body); molded nylon (handle); rubber (head bumper)
	VALVE	Ball valve
	VALVE MATERIALS	ABS, Aluminum
	MAX ANGLE OF DIFFUSED JET	From straight Jet to 110° jet
	DIMENSIONS	230 x 122 x 294mm
	WEIGHT	1.8 kg
	ACCESSORIES	Foam tube (optional)



**INLET
Diameter 1"**



**FLOW RATE
Up to 235 LPM**

VARIABLE FLOW NOZZLE 500 L/MIN

EUROJET-500



VARIABLE FLOW NOZZLE 1000 L/MIN

EUROJET-1000



EFE-EUROJET-500		
FEATURES	VARIABLE FLOW	110-230-360-500 lpm/purge
	FLOW CONTROLE	Rotating ring
	MAXIMUM RANGE	40m at 7 bar
	MATERIALS	Hard anodized aluminum (body); molded nylon (handle); rubber (head bumper)
	VALVE	Ball valve
	VALVE MATERIALS	ABS, Aluminum
	MAX ANGLE OF DIFFUSED JET	From straight Jet to 110° jet
	DIMENSIONS	280 x 345 x 120 mm
	WEIGHT	2.1kg
	ACCESSORIES	Foam tube (optional)



**INLET
Diameter 1,5"**



**FLOW RATE
Up to 500 LPM**

EFE-EUROJET-1000		
FEATURES	VARIABLE FLOW	350-475-560-1000 lpm/purge
	FLOW CONTROLE	Rotating ring
	MAXIMUM RANGE	55m at 7 bar
	MATERIALS	Hard anodized aluminum (body); molded nylon (handle); rubber (head bumper)
	VALVE	Ball valve
	VALVE MATERIALS	ABS, Aluminum
	MAX ANGLE OF DIFFUSED JET	From straight Jet to 110° jet
	DIMENSIONS	280 x 345 x 120 mm
	WEIGHT	2.9 kg
	ACCESSORIES	Foam tube (optional)



**INLET
Diameter 2,5"**



**FLOW RATE
Up to 1000 LPM**



AUTOMATIC DOUBLE JET PRESSURE REGULATED LANCE

EFE-EUROJETMATIC-500



EFE-EUROJETMATIC-500	
DESCRIPTION	Automatic flow and adjustable jet
ENTRANCE AT RACCORD	1.5"
TURNING POINT	
AUTOMATIC FLOW RATE	50-500 L/min
FEATURES	Combination of a straight jet and diffused jet
MAXIMUM RANGE	50 m at 7 bar
MATERIALS	Anodized Aluminum (body), ABS (handle), rubber (bumper)
VALVE	Ball valve
VALVE MATERIALS	Stainless steel
MAX ANGLE DU OF DIFFUSED JET	From straight jet to 130° jet
DIMENSION	225 x 119 x 240mm ; 2,5 kg
WEIGHT	2,5 kg



INLET
1.5"



FLOW RATE
50-500 L/min



JET TYPE
Straight jet, diffused and mist

LANCE WITH DIFFUSER

DN40/DN65 lance barrel + DN40/DN65 diffuser



LANCE + DIFFUSEUR DN40	
ENTRANCE	DN40
MATERIALS	Aluminum alloy
WEIGHT	1 Kg
DIFFUSION	Closed, sheet jet and straight jet
STANDARDS	NF S61-820
LANCE + DIFFUSEUR DN65	
ENTRANCE	DN65
MATERIALS	Aluminum alloy
WEIGHT	1.8 Kg
DIFFUSION	Closed, sheet jet and straight jet
STANDARDS	NF S61-820



INLET
1,5" or 2,5"



JET TYPE
Sheet jet or straight jet

EUROFOAM FOAM TUBE

EFE-EUROFOAM-235 / EFE-EUROFOAM-500 / EFE-EUROFOAM-1000



EFE-EUROFOAM-235-1'	
LENGTH	30.5 cm
WEIGHT	0.8 Kg
PROLIFERATION	5
MATERIALS	Hard anodized Aluminum
EUROFOAM-500-1.1/2'	
LENGTH	32 cm
WEIGHT	1.1 Kg
FOAMING	5
MATERIALS	Hard anodized Aluminum
EFE-EUROFOAM-1000-2.5"	
LENGTH	33.5 cm
WEIGHT	1.4 Kg
FOAMING	5
MATERIALS	Hard anodized Aluminum

07

FIRE HOSES

Fire hoses for fire fighting, we propose a complete range of fire hoses to intervene in the best conditions.

We distribute and market the products worldwide...





EUROFLEX FLATTENABLE FIRE HOSES

EUROFLEX - Exceptional Durability, Versatility, Reliability in Extreme Conditions, Ease of Use, Low Maintenance, Certified Performance, Adaptability, Maritime Use - International couplings, ask us for your standard



FEATURES	SIZES		RÉFÉRENCES	
		DN110/20		EUROFLEX-R-AR100-20M-AL
		DN110/10		EUROFLEX-R-AR100-10M-AL
		DN70/40		EUROFLEX-R-DSP70-40M
		DN70/20		EUROFLEX-R-DSP70-20M
		DN45/40		EUROFLEX-R-DSP45-40M
FEATURES				
MATTER			Nitrile PVC	
RESISTANCE			Resists abrasion, hydrocarbons and chemicals, seawater	
USE			Exterior (withstands harsh weather conditions)	
INTERVIEW			None	



STANDARDS

DIN 14811 classe 3 - BS6391 Type 3 - NFS 61112 - NFS 61112 - MED (Marine Equipment Directive)

FORESTFLEX FLATTENABLE FIRE HOSES

FORESTFLEX



FEATURES	SIZES		RÉFÉRENCES	
		DN70/40		FORESTFLEX-J-DSP70-40M
		DN70/20		FORESTFLEX-J-DSP70-20M
		DN45/40		FORESTFLEX-J-DSP45-40M
		DN45/20		FORESTFLEX-J-DSP45-20M
	FEATURES			
MATTER			Teflon	
RESISTANCE			Abrasion resistant, seawater	
USE			Forest	
EXTERNAL WALL			Circular weaving in fluorescent yellow	
ENVELOPE			Double-weave polyester with double internal coating and EPDM	



STANDARDS

DIN 14811 - EN 14540 - PREN 1924-1 - NFS 61112

FLEXIBLE SUCTION HOSES WITH AR FITTING

ALUMINUM OR BRONZE

EFE-TUYAU-ASPIRAL



FEATURES	TUYAU ASPIRAL	
	INTERNAL DIAMETER	100 mm
	EXTERNAL DIAMETER	128 mm
	THICKNESS	9 mm
	WORKING PRESSURE	10 bar
	CURVATURE RADIUS	890 mm
	WEIGHT	10 Kg
	INNER TUBE	Smooth SBR rubber
	REINFORCEMENT	4 textile plies and metal spirals
	RECOVERY	Abrasion and weather resistant SBR rubber
	PERMISSIBLE DEPRESSION	0.9 bar
	APPEARANCE	Cloth rubber
	LENGTH	2m



STANDARDS

NF ISO 14557 - NFS 61113 - AFNOR

SEMIFLEX-O-GFR20

TUYAU SEMI FLEX WITH OR WITHOUT FITTINGS



NORME
DIN - EN 1947

TUYAU SEMI FLEX	
DIAMETER IN INCHES	1
DIAMETER	25 mm
BURST PRESSURE	95 bar
BURST PRESSURE (DIN)	45 bar
WORKING PRESSURE (DIN)	15 bar
CURVATURE RADIUS	140 mm
VOLUME FLOW RATE	l/min
WALL THICKNESS	2.8 mm
PERMISSIBLE DEPRESSION	0.9 bar
WEIGHT G/M	265
LENGTH	20 / 30 / 40 m
FITTINGS	GFR20 Male/Female

SEMI-RIGID HOSE

TAT0045



NORME
DIN - EN 1947 +A1 CLASSE 2 (Fabric reinforced plastic tube and coating)

SEMI-RIGID PIPE	
INNER TUBE	Red PVC
REINFORCEMENT	1 textile braid
RECOVERY	PVC
PERMISSIBLE DEPRESSION	0.9 bar
APPEARANCE	Smooth
TEMPERATURE	-20°C to + 60°C
COLOR	Red or black
LENGTH	20, 30, 40 meters
HOSE 995 25 CATEGORY 1	
HOSE 996 25 CATEGORY 2	

SEMI-RIGID PVC SPIRAL HOSE

ASPI-PVC-DNXX



TUYAU ASPIRATION	
SURFACE	Smooth
PIPE	Flexible
RESISTANCE	Abrasion, chemical and crush resistant
LENGTH	2m
PERFORMANCES	
TEMPERATURE RANGE	-5°C + 60°C
Ø INTERIOR	From 20 to 80 mm
WEIGHT	210 to 1450 g/m



STORAGE RACK

EFE-RACK



STORAGE RACK	
FEATURES	For vehicle trunk or trailer
	Flat hose storage for any diameters
	Customizable straps
	Quick to install
	Compact
ADDITIONAL INFORMATIONS	
WEIGHT	Following the dimension of the rack
DIMENSIONS	Following the dimension of the rack

FIXED HOSE REELS

EFE-29317



FIXED REEL		
FEATURES	HOSE DIAM	DN25-1"
	WINDING	Right or left
	PIPE CAPACITY	40 or 80 m
	FLANGE DIAMETER	480 or 610 mm
	WINDING	Top winding
	WEIGHT	34 or 37 kg
	COMPLIANT WITH STANDARD	NF S61-522

HIGH PRESSURE ELECTRIC FIXED HOSE REELS

Fixed reels with 12 or 24v electric motors including 50 to 100 m of steel braided reinforced rubber hose, quick connectors and electric rewind as standard.



FIXED REEL		
FEATURES	HOSE DIAM	From 3/8 to 1"¼
	ELECTRIC MOTORS	12-24 V and 220-380 V
	HOSE CAPACITY	50 or 100 m
	INPUT AND OUTPUT DIAMETERS	From 3/8 to 1"¼,
	CONNECTION	Straight or 90° turning in brass or stainless steel
	MAX PRESSURE	From 30 to 350 Bar
	COMPLIANT WITH STANDARD	CE

MOBILE REELS

EFE-5602



MOBILE REELS		
FEATURES	SUPPORT CONNECTOR	DSP65
	WHEELS	Large unbreakable
	CRUTCH	Stainless steel
	ORDER	Wheel brake lock
	VISIBILITY	Class 2 retro-reflective strips
	WHEEL SHAFT	Stainless steel
	ABILITY	200 m of DN70 flattable pipe
	DIMENSIONS	Dimensions : 927 x 800 x 1310mm

08

KEYS, TAPS ACCESSORIES

Our range of fire-fighting faucets is designed to ensure quick and effective response in case of an emergency. With robust materials, high pressure resistance, and compliance with the most stringent safety standards, these devices are ideal for protecting your property and loved ones.

Easy to install and use, our products combine performance and durability for optimal safety.





DIVISION AT DEUX OR TROIS ROBINANDS

DIV-DSP65 DIV-DSP40



FEATURES	DIV-DSP65/2X40		DIV-DSP65/2X65	
	DN ENTRY	DSP65	ENTRANCE	DSP65
	DN OUTPUT 1	DSP40	DN OUTPUT 1	DSP65
	DN OUTPUT 2	DSP40	DN OUTPUT 2	DSP65
	MATTER	Aluminum	MATTER	Aluminum

ADAPTATOR

RE-AR100-SYM65/RE-AR100-DSP65/RE-DSP65-DSP40 in Aluminum or bronze



FEATURES	ADAPTOR	RE-AR100-SYM65	RE-AR100-DSP65	RE-DSP65-DSP40
	INLET DIAMETER	DN100	DN100	DN65
	OUTPUT DIAMETER	DN 65	DN 65	DN 40
	TYPE OF JOINT	Flat	To lip	To lip
	MATTER	Aluminum or bronze	Aluminum or bronze	Aluminum or bronze

POST KEY

EFE-03033



FEATURES	POST KEY	
	MATTER	Aluminum alloy
	2 FINGERS CYLINDRICAL	For unlocking the steering wheels
	SQUARES	30x30 and 15x15
	HOOK	For taps
	WEIGHT	2 Kg
	DIMENSIONS	618 x 80 x 280 cm

ARTICULATED KEY

EFE-02971



FEATURES	ARTICULATED KEY	
	MATERIALS	Aluminum alloy
	SQUARES	30x30 and 15x15
	HOOK	For cover
	WEIGHT	2,1 Kg
	DIMENSIONS	618 x 80 x 280 cm

* Other accessories from plumbing fixtures are available outside this catalog

TRICOISE WRENCH

EFE-03148



FEATURES

TRICOISE WRENCH		
MATERIALS	Steel	STAINLESS STEEL
TYPE OF FITTINGS	From DN20 to DN120	FROM DN20 TO DN120
COLOR	Red	INOX
COATING	Epoxy resin	WITHOUT
WEIGHT	0.50 Kg	0,5 KG

POLYCOISE KEY

EFE-02438



FEATURES

"DESCHAMPS" TRICOISE WRENCH	
TYPE OF FITTINGS	From DN20 at 100
WEIGHT	1 Kg
11 FUNCTIONS	<ul style="list-style-type: none"> • Tightening of fittings with nominal diameters of 20 to 100. • Opening EDF and GDF boxes with the 13 mm female triangle. • Opening fire hydrant boxes with the 15.6 mm female triangle. • Opening windows and doors without handles with the 6.5 mm female square. • Opening of ventilation ducts and fire cabinets with the truncated pyramid square from 5x5 mm to 8x8 mm. • Opening aluminum locks on modern bathroom doors with a screwdriver. • Opening the dry column sockets with the female square of 12.5 mm. • Loosening of M8, M10 and M12 nuts with the hexagonal sockets of 13, 17 and 19 mm. • Opening bottles with caps with the 100 bottle opener.

FLOAT FOR STRAINER

EFE-03280



FEATURES

FLOAT EFE-02438	
WEIGHT	1.560 Kg
DIMENSIONS	36 cm
MATTER	Stainless steel (chain)



LIGHT STRAINER

EFE-03148



PIPE STRAINER LARGE DN100

EFE-03033



STRAINER EFE-03148	
DIAMETER	DN40 or 65
BASKET TYPE	Aluminum, Polyethylene
FLAP	No
WEIGHT	0.6 Kg
DIMENSIONS	12 cm

STRAINER EFE-02438	
DIAMETER	DN100
BASKET TYPE	Aluminum, Polyethylene
FLAP	Non
WEIGHT	1 Kg
DIMENSIONS	18 cm

FLAP STRAINER

EFE-02438



ECO STRAINER

EFE-80/7CF250



STRAINER EFE-02438	
DIAMETER	DN40 or 65 Or 100
BASKET TYPE	Polyethylene, Or Aluminum
FLAP	With or without Flap
WEIGHT	According to strainer
DIMENSIONS	According to strainer

STRAINER 80/7CF250	
DIAMETER	DN65
BASKET TYPE	Steel
FLAP	No
WEIGHT	0.78 Kg
DIMENSIONS	15 cm




Euromast, leader in the manufacture of telescopic masts and fire-fighting equipment.

Our materials and specializations

- The manufacture of **telescopic masts** for lighting, surveillance, industry, military, telecommunications, antennas...
- The manufacture of **fire pumps** high PRESSURE and low PRESSURE, for fire or flood, for agriculture and irrigation, mines, quarries...
- The manufacture of **fixed fire groups** (motor pumps + electric pumps + jockey pumps) for industrial buildings, buildings and shopping centers
- The manufacture and distribution of **Personal Protective Equipment**
- The manufacture of **towable motor pumps**, trailers for communication, trailers for site lighting, lighting during events
- The manufacture of **aluminum curtains** sliding or rolling for fire and industrial vehicles
- The distribution of **fire equipment** and safety and drainage pumps: floating motor pumps, fire hoses, valves, divisions, lighting equipment, rescue equipment, airport equipment, agricultural equipment


The Group **Fireco** worldwide Quality, Reliability and Innovation since 1975

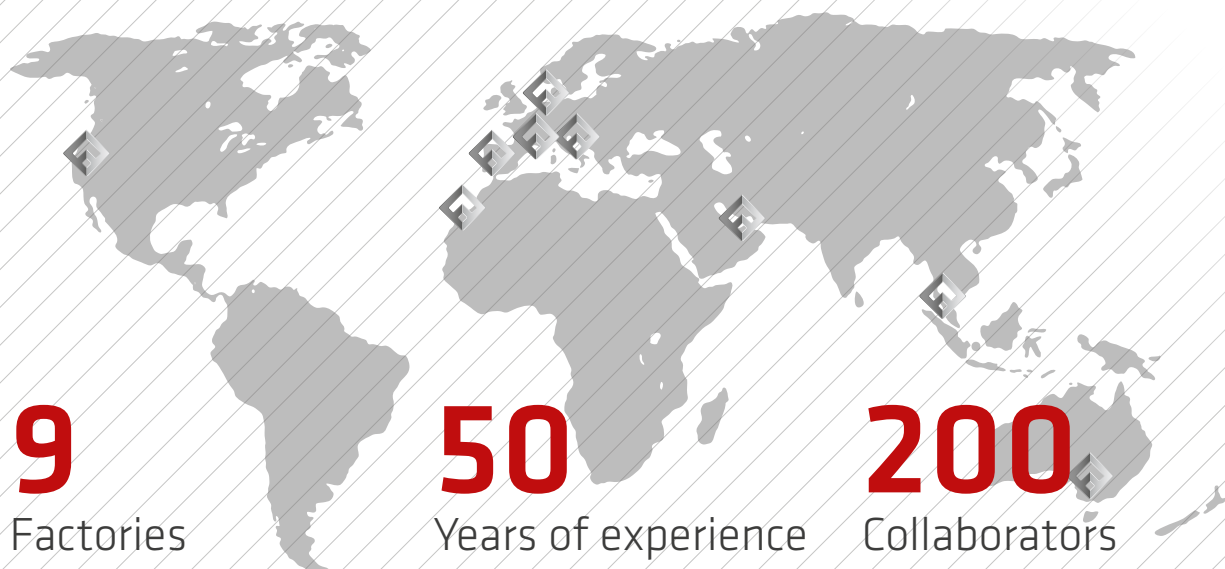



Manufacture and distribution of professional fire and safety equipment

Our areas of expertise :

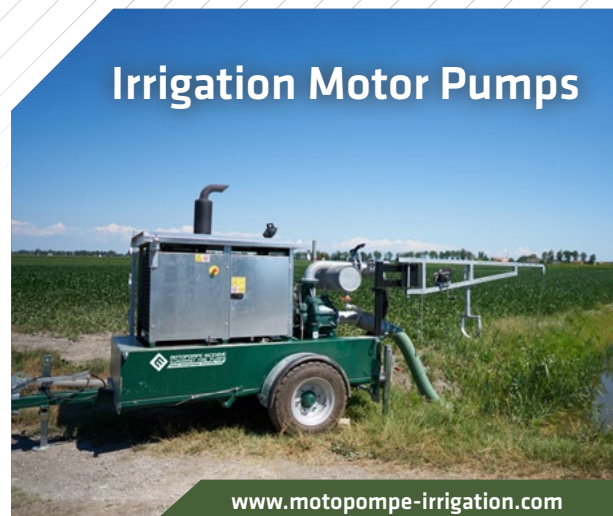



MOTOPOMPE INCENDIE
EUROMAST FIRE PUMPS



Euromast S.a.r.l.

Savoie Hexapole - 101 Rue Louis Armand
73420 MÉRY - FRANCE
fireco@euromast.fr
+33 4 79 34 92 15



WWW.MOTOPOMPE-INCENDIE.COM