


Lampe portative ATEX – Éclairage antidéflagrant rechargeable

Modèle : ELP-Ex-MP52R

Description :

Lampe portative antidéflagrante certifiée ATEX et IECEx, conçue pour les zones à risque (gaz et poussières). Idéale pour les pompiers, secours industriels, maintenance pétrochimique, elle offre sécurité, autonomie et robustesse.

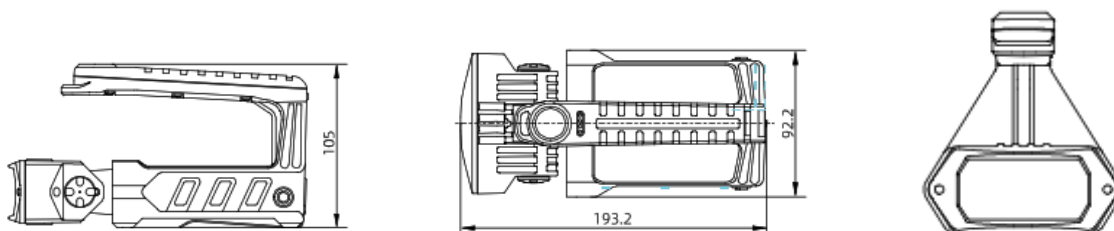

Certifications	IECEx, ATEX, EAC
Marquages Ex	IECEx : Ex ib IIC T4 Gb ; Ex ib IIIB T130 °C Db ATEX : II 2 G Ex ib IIC T4 Gb ; II 2 D Ex ib IIIB T130 °C Db
Température ambiante de travail	-40 °C à +55 °C
Indice de protection	IP66 / IP67
couleur	6500k
Flux lumineux	≥340 lm (mode fort), ≥180 lm (mode travail/SOS)
Autonomie	≥14 h (mode fort), ≥24 h (mode travail)
Distance du faisceau	≥118 m (mode fort), ≥87 m (mode travail)
Batterie	Lithium-ion 18650 – 3,6 V / 10 050 mAh
Temps de charge	≤12 h
Cycles de recharge	500 cycles
Durée de vie LED	≥50 000 h




ATEX Portable Lamp – Rechargeable Explosion-Proof Lighting

Code : ELP-Ex-MP52R

Description :

ATEX and IECEx certified explosion-proof portable lamp, designed for hazardous areas (gas and dust). Ideal for firefighters, industrial rescue teams, and petrochemical maintenance personnel, it offers safety, autonomy, and robustness.

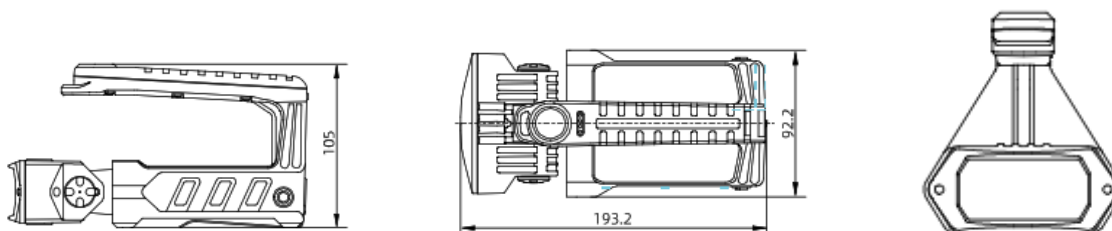

Certifications	IECEx, ATEX, EAC
Ex Markings	IECEx : Ex ib IIC T4 Gb ; Ex ib IIIB T130 °C Db ATEX : II 2 G Ex ib IIC T4 Gb ; II 2 D Ex ib IIIB T130 °C Db
Working ambient temperature	-40 °C à +55 °C
Ingress protection	IP66 / IP67
Color	6500k
Luminous flux	≥340 lm (high mode), ≥180 lm (work/SOS mode)
Run time	≥14 h (high mode), ≥24 h (work mode)
Beam distance	≥118 m (high mode), ≥87 m (work mode)
Battery	Lithium-ion 18650 – 3,6 V / 10 050 mAh
Charging time	≤12 h
Recharge cycles	500 cycles
LED Lifespan	≥50 000 h

