


LAMPE TORCHE INDUSTRIEL RECHARGEABLE OU A PILES

Modèle : ELP-IN-MP21



CE

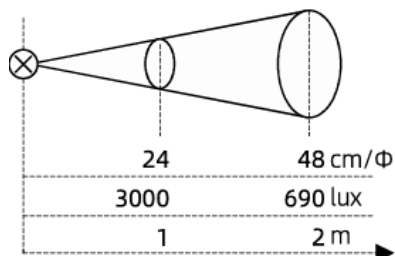

Description

- ◆ Largement utilisé pour l'inspection, les réparations d'urgence et l'éclairage d'urgence sur les chantiers, dans les zones industrielles et le secteur professionnel.
- ◆ Le corps est fabriqué en nylon haute performance. Il est léger, résistant au vieillissement, à la corrosion, aux chocs et facile à transporter.
- ◆ Conception professionnelle de lentille optique, éclairage doux, faisceau uniforme, conforme à la norme de protection incendie GB 30734.




LAMPE TORCHE INDUSTRIEL RECHARGEABLE OU A PILES

Paramètres

Certification	CE
Température ambiante de fonctionnement	$-40^{\circ}\text{C} \leq T_a \leq +55^{\circ}\text{C}$
Indice de protection	IP66/67
Classe anticorrosion	WF2
Température de couleur (CCT)	6500K
Flux lumineux	$\geq 150 \text{ lm}$ (mode fort), $\geq 90 \text{ lm}$ (mode travail)
Autonomie	$\geq 10 \text{ h}$ (mode fort), $\geq 17 \text{ h}$ (mode travail)
Distance du faisceau	$\geq 110 \text{ m}$ (mode fort), $\geq 69 \text{ m}$ (mode travail)
Type de batterie	Batterie lithium 18650 (IEC 61233, IEC 61960)
Capacité de la batterie	3,6 V, 3350 mAh
Mode de charge	Base de charge compatible 1000/01-A21
Temps de charge	$\leq 6,5 \text{ h}$
Cycles de recharge	500 cycles
Durée de vie	50 000 h (sans batterie)

Remarque : Le flux lumineux et la durée de décharge continue sont mesurés dans un environnement de $-20^{\circ}\text{C} \leq T_a \leq +55^{\circ}\text{C}$.

Caractéristiques

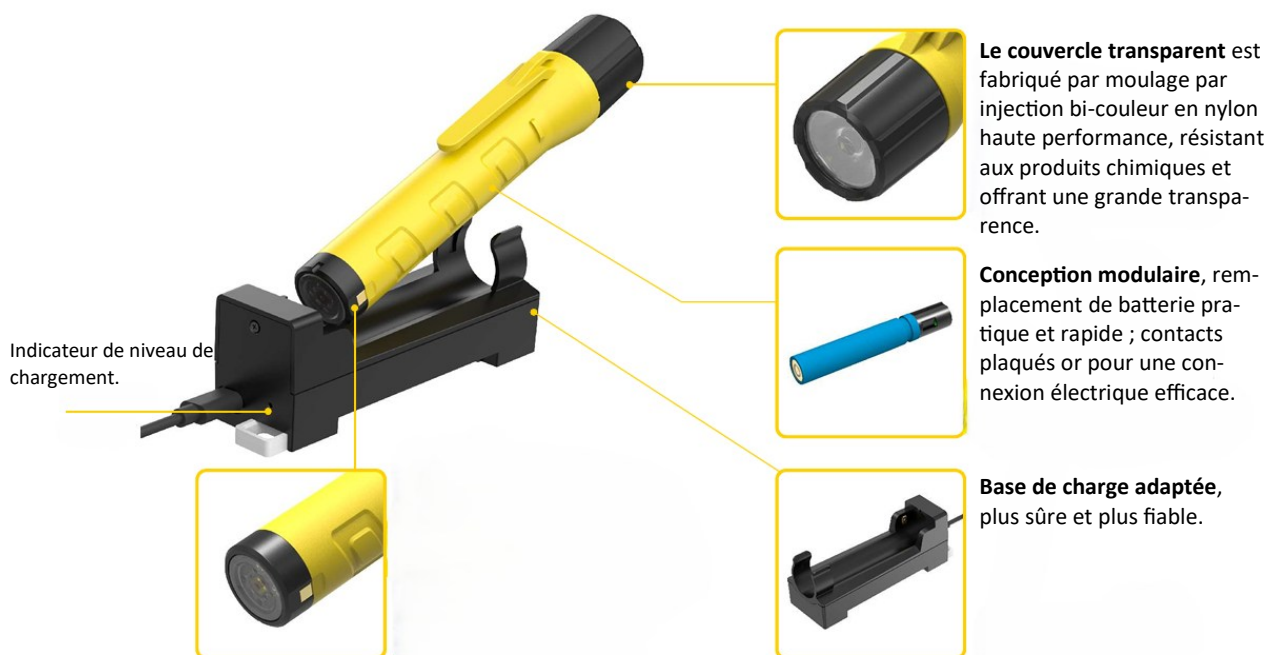

Lumière de position intégrée à l'arrière.
Interrupteur à pression longue, le nombre de clignotements indique le niveau de puissance : 4 clignotements : 75 % – 100 % 3 clignotements : 50 % – 75 %
2 clignotements : 25 % – 50 % 1 clignotement : 0 % – 25 %



Pour commander

Illustration	Description	Poids en Gramme	REF pour commande
	LAMPE TORCHE INDUSTRIEL RECHARGEABLE	99	ELP-IN-MP21R
	LAMPE TORCHE INDUSTRIEL RECHARGEABLE + Socle de chargement + Adaptateur	226	ELP-IN-MP21R+A21
	LAMPE TORCHE INDUSTRIEL A PILES	98	ELP-IN-MP21


Schéma d'installation



Système de chargement

- ◆ **ELP-IN-MP21R** est équipé d'une base de charge dédiée pour garantir une utilisation sûre. La base de charge dispose d'un témoin lumineux : rouge = en charge, vert = complètement chargé.
- ◆ La base de charge possède **2 ports de charge** : AC 100-250 V / 0,5 A et un port de charge intégré situé en bas. Sûr, simple et pratique.
- ◆ Ce produit est compatible avec **le rail de charge intégré type A** et le support de charge.

Remarque : Pour les paramètres techniques du rail de charge intégré et du support de charge, veuillez nous consulter.

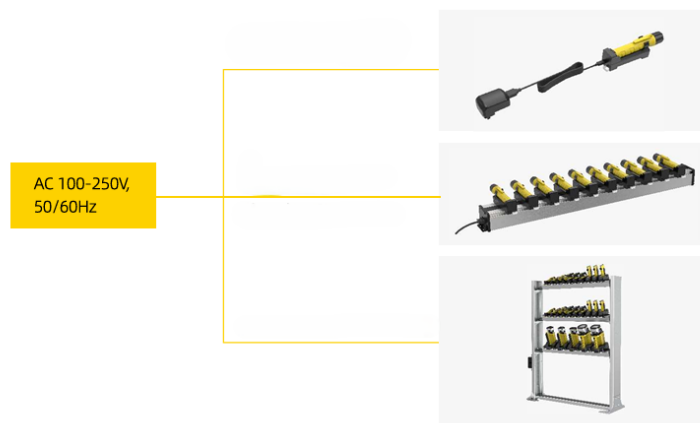



LAMPE TORCHE INDUSTRIEL RECHARGEABLE OU A PILES


Accessoires de montage

Illustration	Description	Poids en Gramme	REF pour commande
support en forme de U		49	ELP-10000/11-01-02U
	Appliquer sur un casque sans visière		
support en forme de L		44	ELP-10000/11-01-02L
	Appliquer sur un casque à visière		




Pièces de rechange


Illustration	Description	Poids en Gramme	REF pour commande
Batterie lithium	3.6V, 3350mAh	49	ELP-1000/05-R21



Socle de chargement	Tension/courant d'entrée : CC 5,0 V / 2000 mA	44	ELP-1000/01-A21
---------------------	--	----	-----------------





Socle de chargement + Adaptateur.	Tension/courant d'entrée : CA 100–250 V / 500 mA	127	ELP-1000/01-A21-EN
--------------------------------------	---	-----	--------------------





**Tension/courant d'entrée :
CC 5,0 V / 2000 mA**




Dimensions (unité : mm)

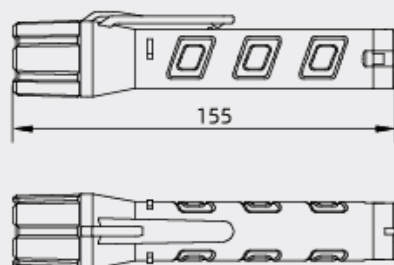


INMP21R

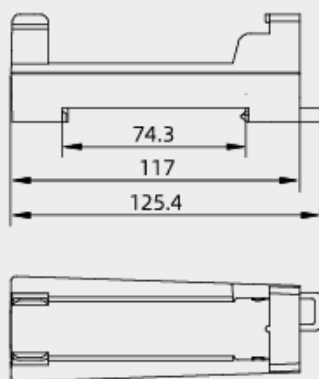

1000/01-A21

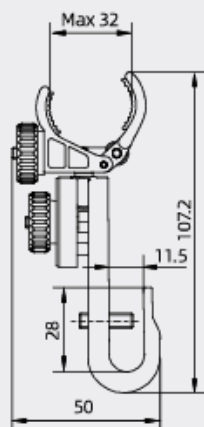


1000/11-01-02U



1000/11-01-02L



INDUSTRIAL TORCH LAMP, RECHARGEABLE OR BATTERY-POWERED

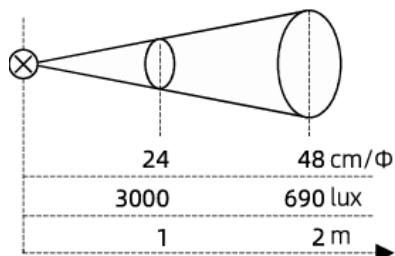

Description

- ♦ Widely used for inspection, emergency repairs, and emergency lighting on construction sites, in industrial areas, and in the professional sector.
- ♦ The body is made of high-performance nylon. It is lightweight, resistant to aging, corrosion, and impact, and easy to transport.
- ♦ Professional optical lens design, soft lighting, uniform beam, compliant with GB 30734 fire protection standard.



INDUSTRIAL TORCH LAMP, RECHARGEABLE OR BATTERY-POWERED

Settings

Certification:	CE
Working ambient temp.:	-40°C ≤ Ta ≤ +55°C
Ingress protection:	IP66/67
Corrosion-proof grade:	WF2
CCT:	6500K
Luminous flux:	≥150lm (strong mode), ≥90lm (work mode)
Run time:	≥10h (strong mode), ≥17h (work mode)
Beam distance:	≥110m (strong mode), ≥69m (work mode)
Battery type:	18650 lithium battery (IEC 61233, IEC 61960)
Battery capacity:	3.6V, 3350mAh
Charging way:	matched 1000/01-A21 charging base
Charging time:	≤6.5h
Recharging cycles:	500 cycles
Lifespan:	50,000h (without battery)

Note: The luminous flux and continuous discharge time are the values measured under the environment of -20°C ≤ Ta ≤ +55°C.



INDUSTRIAL TORCH LAMP, RECHARGEABLE OR BATTERY-POWERED



Illustration	Description	Weight in Gramme	REF pour commande
	RECHARGEABLE INDUSTRIAL FLASHLIGHT	99	ELP-IN-MP21R
	RECHARGEABLE INDUSTRIAL FLASHLIGHT + Replacement base + Adapter	226	ELP-IN-MP21R+A21
	INDUSTRIAL BATTERY -POWERED FLASHLIGHT	98	ELP-IN-MP21

Note: Users can choose type A integrated charging track rail and integrated charging stand. Please see pages 03-05 for details.



INDUSTRIAL TORCH LAMP, RECHARGEABLE OR BATTERY-POWERED

Installation diagram



Hand-held



U shape bracket
Apply to brimless helmet



L shape bracket
Apply to helmet with brim

Charging system

- INMP21R is equipped with a dedicated charging base to ensure safe use. The charging base has a charging indicator light, red means charging, green means fully charged.
- The charging base has 2 charging ports -AC 100-250V/0.5A and a matched integrated charging port at the bottom. Safe, simple and convenient.
- This product is suitable for type A integrated charging track rail and charging stand.

AC 100-250V,
50/60Hz


Individual Charging



Type A Integrated
Charging Track Rail



Integrated Charging Stand





Note: For technical parameters of integrated charging track rail and integrated charging stand, please refer to pages 03-05.



INDUSTRIAL TORCH LAMP, RECHARGEABLE OR BATTERY-POWERED

Spare parts

Illustration	Description	Weight (g)	Order No.
Lithium battery pack 	3.6V, 3350mAh	59	1000/05-R21
Charging base 	Input voltage/current: DC 5.0V/2000mA	55	1000/01-A21
Charging base + Adapter 	Input voltage/current: AC 100-250V/500mA Input voltage/current: DC 5.0V/2000mA	127	1000/01-A21-□ 

Outline dimension (unit: mm)

