




LAMPE A MAIN RECHARGEABLE LED 300 lumen

Modèle : ELP-IN-MP61

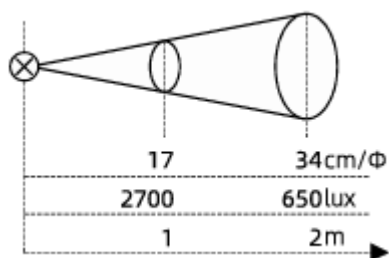

Description


- ◆ Largement utilisé pour l'inspection, les réparations d'urgence et l'éclairage d'urgence sur les chantiers, dans les zones industrielles et le secteur professionnel.
- ◆ Le corps est fabriqué en nylon haute performance. Il est léger, résistant au vieillissement, à la corrosion, aux chocs et facile à transporter.
- ◆ Conception professionnelle de lentille optique, éclairage doux, faisceau uniforme, conforme à la norme de protection incendie GB 30734.

Paramètres

Certification	CE	CE
Modèles	INMP61R-1	INMP61R-2
Température ambiante	$-40^{\circ}\text{C} \leq T_a \leq +55^{\circ}\text{C}$	$-40^{\circ}\text{C} \leq T_a \leq +55^{\circ}\text{C}$
Indice de protection	IP66/67	IP66/67
CCT	6500K	6500K
Flux lumineux	≥ 300 lm (mode fort) ≥ 140 lm (mode travail) ≥ 140 lm (mode SOS)	≥ 300 lm (mode fort) ≥ 140 lm (mode travail) ≥ 140 lm (mode SOS)
Autonomie	≥ 9 h (mode fort) ≥ 11 h (mode travail)	≥ 14 h (mode fort) ≥ 21 h (mode travail)
Distance du faisceau	≥ 104 m (mode fort) ≥ 68 m (mode travail)	≥ 104 m (mode fort) ≥ 68 m (mode travail)
Type de batterie	Batterie lithium 18650 (IEC 61233, IEC 61960)	Batterie lithium 18650 (IEC 61233, IEC 61960)
Capacité batterie	3,6 V, 3350 mAh	3,6 V, 6700 mAh
Mode de charge	Base de charge 1000/01-A61 adaptée	Base de charge 1000/01-A61 adaptée
Temps de charge	$\leq 6,5$ h	≤ 9 h
Cycles de recharge	500 cycles	500 cycles
Durée de vie	50 000 h (sans batterie)	50 000 h (sans batterie)

Remarque : Le flux lumineux et la durée de décharge continue sont mesurés dans un environnement de $-20^{\circ}\text{C} \leq T_a \leq +55^{\circ}\text{C}$.

Caractéristiques

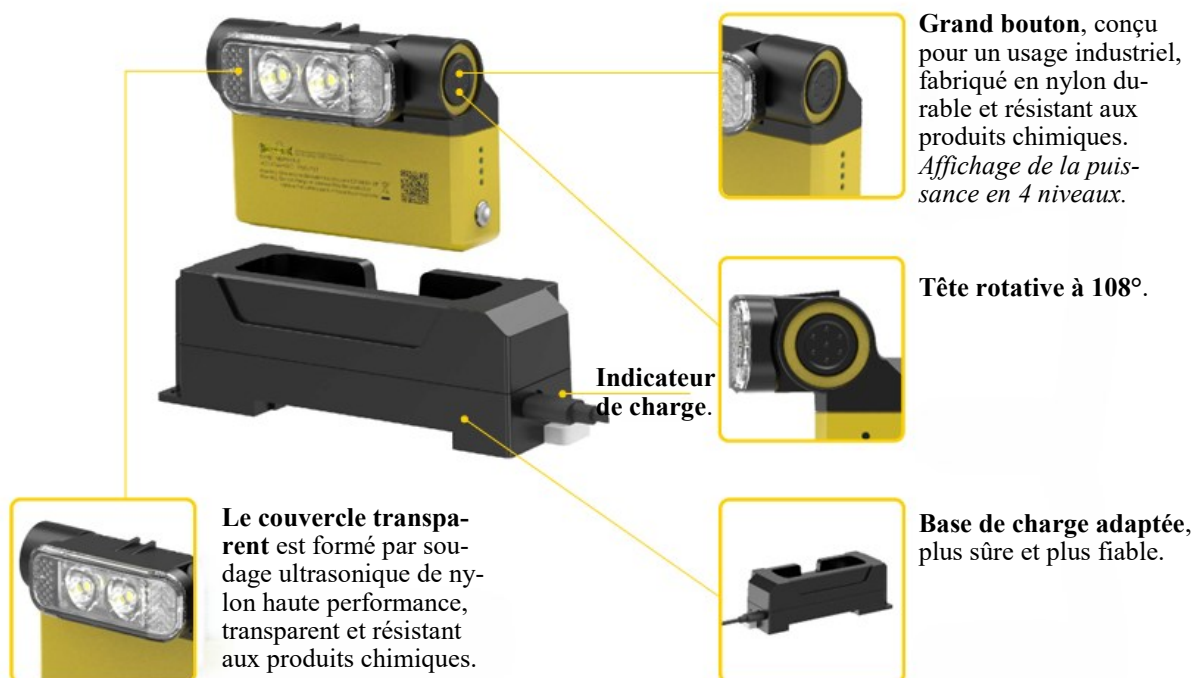



Pour commander


Illustration	Description	Capacité de la batterie	Poids (g)	Réf. commande
	Lampe frontale LED rechargeable industrielle	3,6 V, 3350 mAh	159	INMP61R-1
	Lampe frontale LED rechargeable industrielle	3,6 V, 6700 mAh	209	INMP61R-2
	Lampe frontale LED rechargeable industrielle + Base de charge + Adaptateur	3,6 V, 3350 mAh	330	INMP61R-1+A61-330
	Lampe frontale LED rechargeable industrielle + Base de charge + Adaptateur	3,6 V, 6700 mAh	380	INMP61R-2+A61-380

Schéma d'installation



- ♦ **ELP-IN-MP61R-1 et ELP-IN-MP61R-2** est équipé d'une base de charge dédiée pour garantir une utilisation sûre. La base de charge dispose d'un témoin lumineux : rouge = en charge, vert = complètement chargé.
- ♦ La base de charge possède **2 ports de charge** : AC 100-250 V / 0,5 A et un port de charge intégré situé en bas. Sûr, simple et pratique.
- ♦ Ce produit est compatible avec **le rail de charge intégré type A** et le support de charge.


Remarque : Pour les paramètres techniques du rail de charge intégré et du support de charge, veuillez nous consulter.

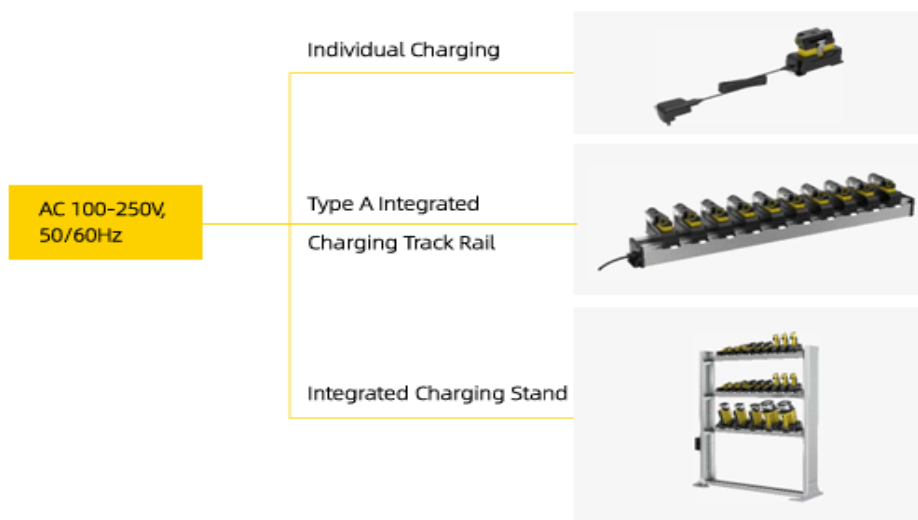



RECHARGEABLE LED HANDLAMP 300 lumens

Modèle : ELP-IN-MP61

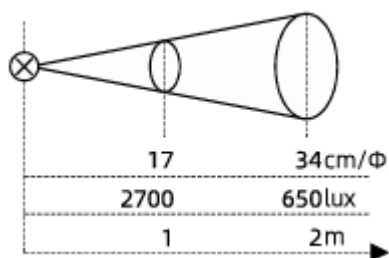

Description

- ♦ Widely used for inspection, emergency repairs, and emergency lighting on construction sites, in industrial areas, and in the professional sector.
- ♦ The body is made of high-performance nylon. It is lightweight, resistant to aging, corrosion, and impact, and easy to transport.
- ♦ Professional optical lens design, soft lighting, uniform beam, compliant with GB 30734 fire protection standard.



RECHARGEABLE LED HANDLAMP 300 lumens

Item	Model INMP61R-1	Model INMP61R-2
Certification	CE	CE
Models	INMP61R-1	INMP61R-2
Working Ambient Temp.	-40°C ≤ Ta ≤ +55°C	-40°C ≤ Ta ≤ +55°C
Ingress Protection	IP66/67	IP66/67
CCT (Color Temp.)	6500K	6500K
Luminous Flux	≥300 lm (strong mode) ≥140 lm (work mode) ≥140 lm (SOS mode)	≥300 lm (strong mode) ≥140 lm (work mode) ≥140 lm (SOS mode)
Run Time	≥9 h (strong mode) ≥11 h (work mode)	≥14 h (strong mode) ≥21 h (work mode)
Beam Distance	≥104 m (strong mode) ≥68 m (work mode)	≥104 m (strong mode) ≥68 m (work mode)
Battery Type	18650 lithium battery (IEC 61233, IEC 61960)	18650 lithium battery (IEC 61233, IEC 61960)
Battery Capacity	3.6 V, 3350 mAh	3.6 V, 6700 mAh
Charging Way	Matched 1000/01-A61 charging base	Matched 1000/01-A61 charging base
Charging Time	≤6.5 h	≤9 h
Recharging Cycles	500 cycles	500 cycles
Lifespan	50,000 h (without battery)	50,000 h (without battery)

Note: The luminous flux and continuous discharge time are measured under the environment of -20°C ≤ Ta ≤ +55°C.





Order specifications

Illustration	Description	Battery Capacity	Weight (g)	Order No.
	Industrial Rechargeable LED Headtorch	3.6V, 3350mAh	159	INMP61R-1
	Industrial Rechargeable LED Headtorch	3.6V, 6700mAh	209	INMP61R-2
	Industrial Rechargeable LED Headtorch + Charging Base + Adapter	3.6V, 3350mAh	330	INMP61R-1+A61-330
	Industrial Rechargeable LED Headtorch + Charging Base + Adapter	3.6V, 6700mAh	380	INMP61R-2+A61-380

Charging system

- ELP -IN-MP61R-1 and ELP -IN-MP61R-2 are equipped with a dedicated charging base to ensure safe use. The charging base has a charging indicator light, red means charging, green means fully charged.
- The charging base has 2 charging ports – AC 100-250V/0.5A and a matched integrated charging port at the bottom. Safe, simple and convenient.
- This product is suitable for type A integrated charging track rail.

Note: For technical parameters of integrated charging track rail and integrated charging stand, please refer to pages 03–05.

