




PROJECTEUR A MAIN RECHARGEABLE 500 Lumen

Modèle : ELP-IN-MP52R



Application

- ◆ Largement utilisé pour l'inspection, les réparations d'urgence et l'éclairage d'urgence pour la construction, etc., dans les zones industrielles et les secteurs professionnels.
- ◆ Le corps est fabriqué en nylon haute performance. Il est léger, anti-âge, anti-corrosion, résistant aux chocs et facile à transporter.
- ◆ Conception professionnelle de lentille optique, éclairage doux, faisceau uniforme, conforme à la norme de protection contre l'incendie GB 30734.

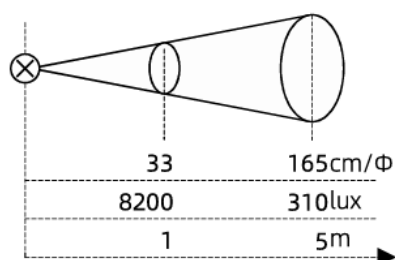



PROJECTEUR A MAIN RECHARGEABLE 500 Lumen

Caractéristiques

Certifications	CE
Usage	Zone industrielle non explosive
Température ambiante de travail	-40°C ≤ Ta ≤ +55°C
Protection	IP66/67
Température de Couleur Corrélée	6500K (Kelvin)
Flux lumineux	≥ 500lm (mode élevé), ≥ 230lm (mode de travail), ≥ 230lm (mode SOS)
Durée d'exécution	≥ 11h (mode élevé), ≥ 20h (mode de travail)
Distance du faisceau	≥ 181m (mode élevé) ≥ 108m (mode travail)
Type de batterie	18650 batterie lithium (IEC 61233, IEC 61960)
Capacité de la batterie	3.6V, 10050mAh
Dimensions	Longueur 193,2mm Largeur 92,2mm


Chargement

Temps de chargement	≤ 12h
Fonctionnement du chargement	Rouge pour le chargement, vert pour la charge complète.
Base de chargement	3 ports de chargement AC 100-250V /3A, DC 5.0V /3A et un port de chargement intégré assorti en bas
Supports chargements	Base de chargement + adaptateur
Cycles de recharge	500 cycles
Durée de vie	50,000h (sans la batterie)





Schéma d'installation



Type magnétique : Peut être fixé sur un cadre métallique, libérant vos mains pendant le travail.



Type suspendu : Peut être accroché à un support pour libérer vos mains pendant le travail.

Système de charge

- ◆ ELP-IN-MP51R est équipé d'une base de charge dédiée pour garantir une utilisation sûre. La base de charge dispose d'un indicateur lumineux : rouge = en charge, vert = complètement chargé. DC 5,0V / 3A
- ◆ La base de charge possède 3 ports de charge : AC 100-250V / 3A, DC 5,0V / 3A et un port de charge intégré situé en bas. Sûr, simple et pratique. AC 100-250V, 50/60Hz
- ◆ Ce produit est compatible avec le rail de charge intégré type B.

Remarque : Pour les paramètres techniques du rail de charge intégré et du support de charge intégré, veuillez vous référer aux pages 03-05.




RECHARGEABLE HANDHELD PROJECTOR 500 Lumens

Model : ELP-IN-MP52R



Application

- ♦ Widely used for inspection, emergency repairs, and construction emergency lighting in industrial areas and professional sectors.
- ♦ The body is made of high-performance nylon. It is lightweight, anti-aging, anti-corrosion, impact-resistant, and easy to carry.
- ♦ Professional optical lens design, soft illumination, uniform beam, compliant with GB 30734 fire protection standard.

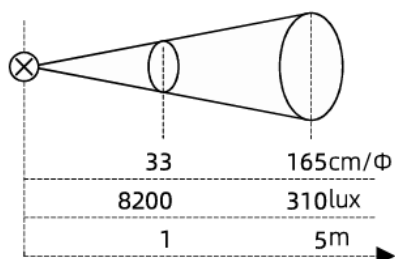



RECHARGEABLE HANDHELD PROJECTOR 500 Lumens

Characteristics

Certification	CE
Usage	Non-explosive industrial area
Working ambient temp	-40°C ≤ Ta ≤ +55°C
Ingress protection	IP66/67
CCT	6500K (Kelvin)
Luminous flux	≥ 500lm (strong mode), ≥ 230lm (work mode), ≥ 230lm (SOS mode)
Run time	≥ 11h (strong mode), ≥ 20h (work mode)
Beam distance	≥ 181m (strong mode) ≥ 1108m (work mode)
Battery type	18650 lithium battery (IEC 61233, IEC 61960)
Battery capacity	3.6V, 10050mAh
Dimensions	Leigth 193,2mm Width 92,2mm


Charging system

Charging time	≤ 12h
Charging operation	Red means charging, green means fully charged
Charging base	3 charging ports AC 100-250V /0.5A, DC 5.0V /2A and a matched integrated charging port at the bottom
Chargement support	Charging base + power cord
Recharging cycles	500 cycles
Lifespan	50,000h (without battery)





Installation diagram



Magnetic type: Can be attached to a metal frame, freeing your hands while you work.



Hanging type: Can be hung on a support to free your hands while working.

Charging System

- ◆ The ELP-IN-MP51R is equipped with a dedicated charging base to ensure safe use. The charging base has a light indicator: red = charging, green = fully charged.
DC 5.0V / 3A
- ◆ The charging base has 3 charging ports:
 - AC 100-250V / 3A
 - DC 5.0V / 3A
 - An integrated charging port located at the bottom.Safe, simple, and convenient.
AC 100-250V, 50/60Hz
- ◆ This product is compatible with the integrated type B charging rail.

Note: For technical specifications of the integrated charging rail and the integrated charging support, please refer to pages 03–05.

