

Variable flow fire hose


Reference code : EUROJET- 500

Descriptif :



- Model Identification
- Hard Anodized Aluminum labels, Laser Engraved
- Simple to operate (1/4 turn from straight stream to fog)
- Raised spigot marks straight flow for operations with limited visibility
- Easy to service & repair.
- Compatible with quick-coupling foam tube
- Warranty, Guarantee : 24 months from date of acceptance

Specifications :

Weight	1.9 kg
Body	Hard Anodized Aluminum
Valve	ABS
Handle	ABS
Work pressure	7bar
Max pressure	25bar
Throw range	40m@7bar
Flow rates	110-230-360-500 LPM
Femelle BSP inlet	2.5" = 63.5 mm

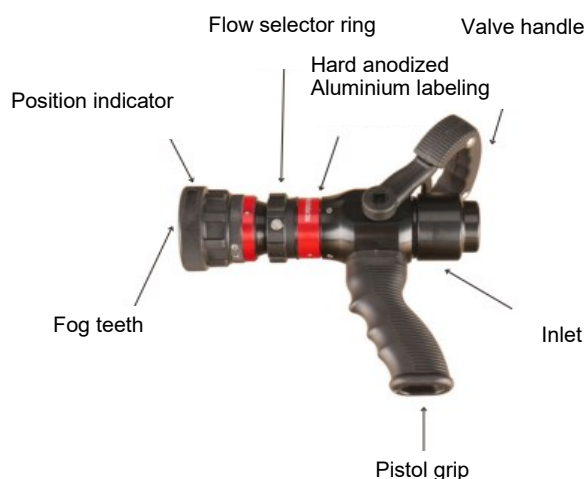

Operating mode :

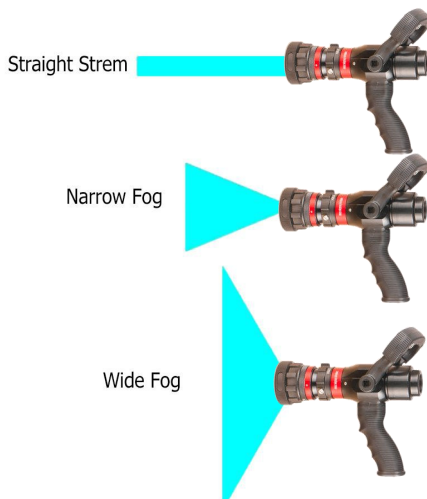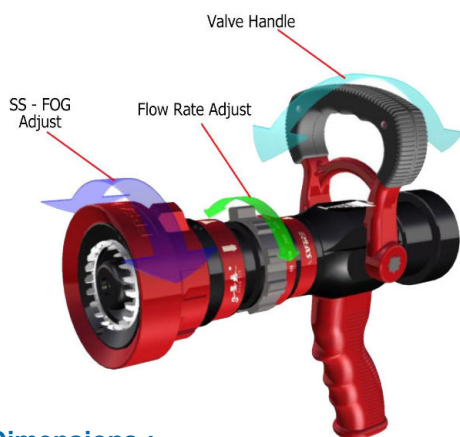


Valve closed : Push the handle forward

Valve open : Push the handle backward

Flow adjustment : Turn the flow control ring to achieve the required flow."

Dimensions :

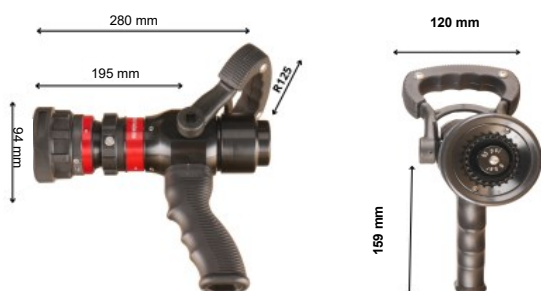

Pictures of the fire nozzle with EUROFOAM foam attachment



(Pictures with EUROFOAM)

