

Portable Remote-Control Fire Monitor

Flowrate 1200-4800 LPM, automatic nozzle
Water Jetting Range: Max ≥ 85 meters@4800LPM
Working Pressure: 8-10 bar (0.8-1.0 MPa)
Net Weight: 36kg(Monitor);
Gross weight: 52kg
Wooden Case Package: 105*52*72cm
Color: RAL3000Red standard

Model :EFE-1080W-B

MAXIMUM FLOW
1250 GPM @ 145 PSI
(4800 L/min @ 10 BAR)



The **EUROMAST® Portable Remote-Control Fire Monitor** is a high-performance firefighting solution designed to provide maximum extinguishing efficiency while enhancing firefighter safety. Its compact and portable design allows for rapid deployment in emergency situations, making it ideal for industrial, municipal, marine, and hazardous environments.


Once installed and connected to the water supply, the monitor can be operated remotely from a safe distance using a wireless controller, minimizing personnel exposure to heat, smoke, and other operational hazards. The monitor can be remotely rotated in both horizontal and vertical directions, providing precise targeting of the fire source.

The integrated nozzle system allows the operator to switch between straight stream and fog patterns, ensuring effective fire suppression, cooling, exposure protection, and vapor control. Manufactured with a corrosion-resistant 304L stainless steel body and equipped with a durable aluminum alloy quad stacked tips nozzle, the monitor delivers reliable performance even in demanding environments.


Designed for high-capacity applications, the EUROMAST® Portable Remote-Control Fire Monitor provides flow rates up to **4,800 LPM** with a fog pattern reaching **120°**, offering powerful and versatile firefighting capabilities.



Model :EFE-1080W-B

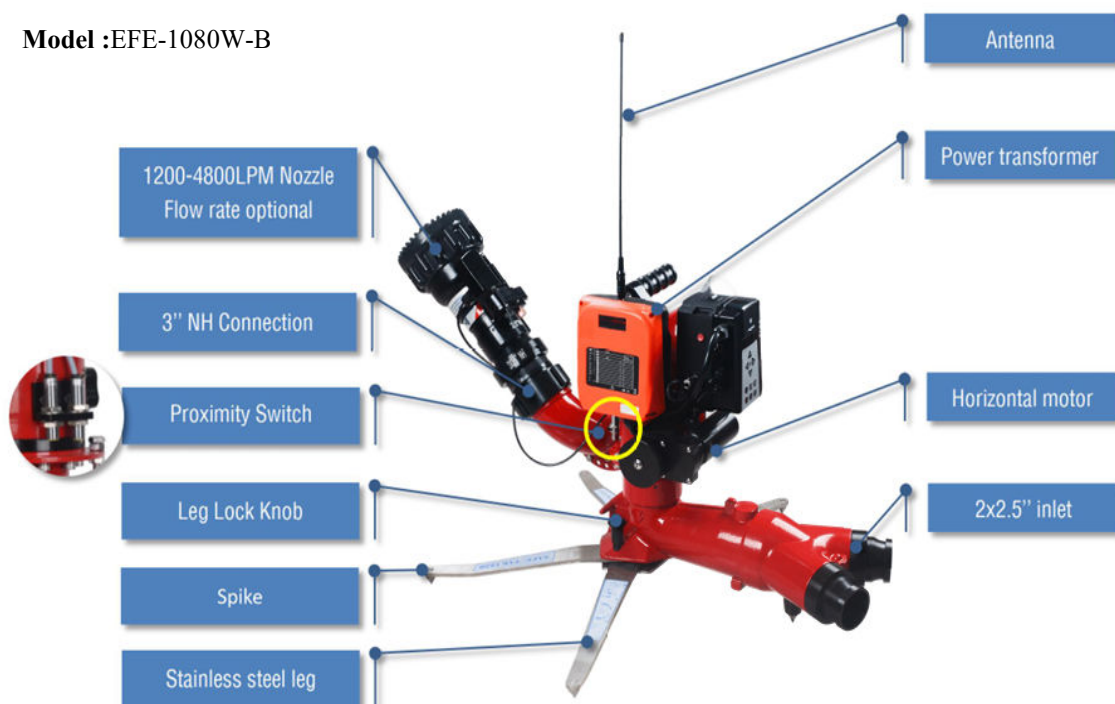

SIDE A DETAILS VIEW

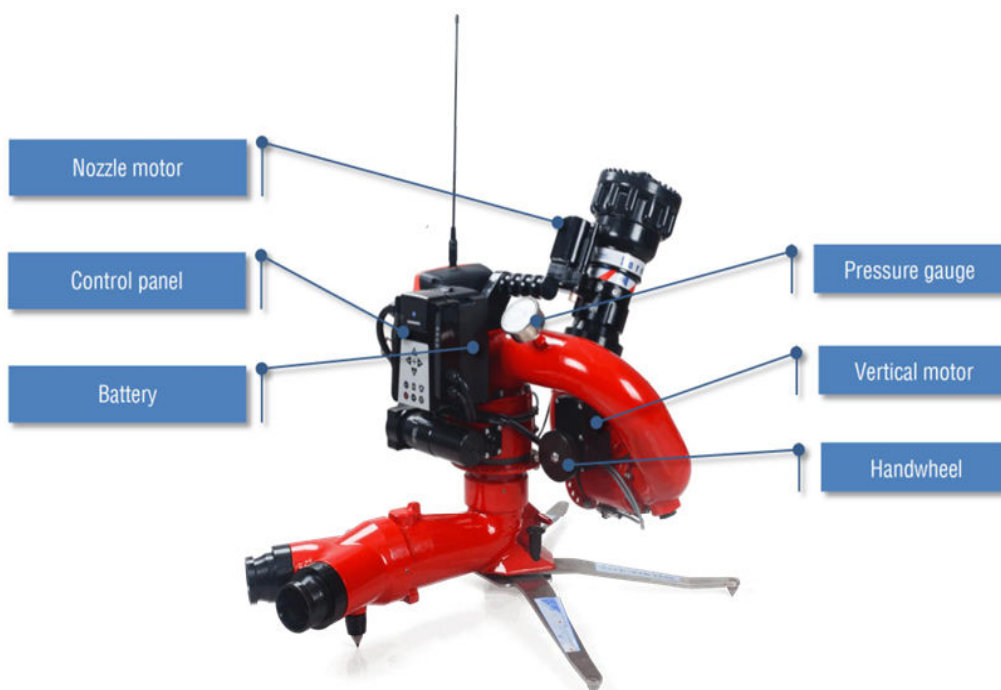

CONTROL SYSTEM COMPONENT LIST

Model :EFE-1080W-B

NAME	Monitor Device (Standard)	Battery Charger (Standard)
IMAGE		
DESCRIPTION	DC 24V is standard, DC 12V / AC 220V optional 2X2.5" inlet flange, others customized	24V Charger for Battery
NAME	Safety Belt (Standard)	RC Transmitter (Standard)
IMAGE		
DESCRIPTION	For fixed monitor	Max. 150 meters RC Distance IP67 Standard Sealed

AUTOMATIC, CONSTANT, SELECTABLE FLOW NOZZLES

The EUROMAST® Portable Fire Monitor can be equipped with a variety of water or water/foam nozzles.



Stacked Nozzle



Foam Attached Nozzle



Flow Adjustable Nozzle